

Open n-Qubit System as a Quantum Computer with Four-Valued Logic

Vasily E. Tarasov

*Skobeltsyn Institute of Nuclear Physics,
Moscow State University, Moscow 119899, Russia*

E-mail: TARASOV@THEORY.SINP.MSU.RU

**Preprint of Skobeltsyn Institute of Nuclear Physics,
Moscow State University, Moscow**

SINP MSU 2001-31/671 20 August 2001

Abstract

In this paper we generalize the usual model of quantum computer to a model in which the state is an operator of density matrix and the gates are general superoperators (quantum operations), not necessarily unitary. A mixed state (operator of density matrix) of n two-level quantum system (open or closed n -qubit system) is considered as an element of 4^n -dimensional operator Hilbert space (Liouville space). It allows to use quantum computer (circuit) model with 4-valued logic. The gates of this model are general superoperators which act on n -ququats state. Ququat is quantum state in a 4-dimensional (operator) Hilbert space. Unitary two-valued logic gates and quantum operations for n -qubit open system are considered as four-valued logic gates acting on n -ququats. We discuss properties of quantum 4-valued logic gates. In the paper we study universality for quantum four-valued logic gates.

PACS 3.67.Lx; 03.65-w; 3.65.Bz

Keywords: Quantum computation, open quantum systems, ququats, many-valued logic

arXiv:quant-ph/0112023v1 4 Dec 2001

I Introduction

Usual models for quantum computer use closed n-qubit systems and deal only with unitary gates on pure states. In these models it is difficult or impossible to deal formally with measurements, dissipation, decoherence and noise. It turns out, that the restriction to pure states and unitary gates is unnecessary [1].

One can describe an open system starting from a closed system if the open system is a part of the closed system. However, situations can arise where it is difficult or impossible to find a closed system comprising the given open system. This would render theory of dissipative and open systems a fundamental generalization of quantum mechanics [2]. Understanding dynamics of open systems is important for studying quantum noise processes [3, 4, 5], quantum error correction [6, 8, 9, 11, 12], decoherence effects [13, 14, 15, 16, 17, 18, 19, 20, 21] in quantum computations and to perform simulations of open quantum systems [22, 23, 24, 25, 26, 27].

In this paper we generalize the usual model of quantum computer to a model in which the state is a density matrix operator and the gates are general superoperators (quantum operations), not necessarily unitary. Pure state of n two-level closed quantum systems is an element of 2^n -dimensional Hilbert space and it allows to realize quantum computer model with 2-valued logic. The gates of this computer model are unitary operators act on a such state. In general case, mixed state (operator of density matrix) of n two-level quantum systems is an element of 4^n -dimensional operator Hilbert space (Liouville space). It allows to use quantum computer model with 4-valued logic. The gates of this model are general superoperators (quantum operations) which act on general n-ququats state. Ququat [55] is quantum state in a 4-dimensional (operator) Hilbert space. Unitary gates and quantum operations for quantum two-valued logic computer can be considered as four-valued logic gates of new model. In the paper we consider universality for general quantum 4-valued logic gates acting on ququats.

In Sections 2, 3 and 5, the physical and mathematical background (pure and mixed states, Liouville space and superoperators, evolution equations for closed and open quantum) are considered. In Section 4, we introduce generalized computational basis and generalized computational states for 4^n -dimensional operator Hilbert space (Liouville space). In the Section 6, we study some properties of general four-valued logic gates. Unitary gates and quantum operations of two-valued logic computer are considered as four-valued logic gates. In Section 7, we introduce a four-valued classical logic formalism. In Section 8, we realize classical 4-valued logic gates by quantum gates. In Section 9, we consider a universal set of quantum 4-valued logic gates. In Section 10, quantum four-valued logic gates of order (n,m) as a map from density matrix operator on n-ququats to density matrix operator on m-ququats are discussed.

II Quantum state and qubit

II.1 Pure states

A quantum system in a pure state is described by unit vector in a Hilbert space \mathcal{H} . In the Dirac notation a pure state is denoted by $|\Psi\rangle$. The Hilbert space \mathcal{H} is a linear space with an inner product. The inner product for $|\Psi_1\rangle, |\Psi_2\rangle \in \mathcal{H}$ is denoted by $\langle \Psi_1 | \Psi_2 \rangle$. A quantum bit or qubit, the fundamental concept of quantum computations, is a two-state quantum system. The two basis states labeled $|0\rangle$ and $|1\rangle$, are orthogonal unit vectors, i.e.

$$\langle k | l \rangle = \delta_{kl},$$

where $k, l \in \{0, 1\}$. The Hilbert space of qubit is $\mathcal{H}_2 = \mathbb{C}^2$. The quantum system which corresponds to a quantum computer (quantum circuits) consists of n quantum two-state particles. The Hilbert space $\mathcal{H}^{(n)}$ of such a system is a tensor product of n Hilbert spaces \mathcal{H}_2 of one two-state particle: $\mathcal{H}^{(n)} = \mathcal{H}_2 \otimes \mathcal{H}_2 \otimes \dots \otimes \mathcal{H}_2$. The space $\mathcal{H}^{(n)}$ is a $N = 2^n$ dimensional complex linear space. Let us choose a basis for $\mathcal{H}^{(n)}$ which consists of the $N = 2^n$ orthonormal states $|k\rangle$, where k is in binary representation. The state $|k\rangle$ is a tensor product of the states $|k_i\rangle$ in $\mathcal{H}^{(n)}$:

$$|k\rangle = |k_1\rangle \otimes |k_2\rangle \otimes \dots \otimes |k_n\rangle = |k_1 k_2 \dots k_n\rangle,$$

where $k_i \in \{0, 1\}$ and $i = 1, 2, \dots, n$. This basis is usually called computational basis which has 2^n elements. A pure state $|\Psi(t)\rangle \in \mathcal{H}^{(n)}$ is generally a superposition of the basis states

$$|\Psi(t)\rangle = \sum_{k=0}^{N-1} a_k(t) |k\rangle, \quad (1)$$

with $N = 2^n$ and $\sum_{k=0}^{N-1} |a_k(t)|^2 = 1$. The inner product between $|\Psi\rangle$ and $|\Psi'\rangle$ is denoted by $\langle \Psi | \Psi' \rangle$ and

$$\langle \Psi | \Psi' \rangle = \sum_{k=0}^{N-1} a_k^* a'_k.$$

II.2 Mixed states

In general, a quantum system is not in a pure state. Open quantum systems are not really isolated from the rest of the universe, so it does not have a well defined pure state. Landau and von Neumann introduced a mixed state and a density matrix into quantum theory. A density matrix is a Hermitian ($\rho^\dagger = \rho$), positive ($\rho > 0$) operator on $\mathcal{H}^{(n)}$ with unit trace ($Tr\rho = 1$). Pure states can be characterized by idempotent condition $\rho^2 = \rho$. A pure state (1) is represented by the operator $\rho = |\Psi\rangle\langle\Psi|$.

One can represent an arbitrary density matrix operator $\rho(t)$ for n-qubits in terms of tensor products of Pauli matrices σ_μ :

$$\rho(t) = \frac{1}{2^n} \sum_{\mu_1 \dots \mu_n} P_{\mu_1 \dots \mu_n}(t) \sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n}. \quad (2)$$

where each $\mu_i \in \{0, 1, 2, 3\}$ and $i = 1, \dots, n$. Here σ_μ are Pauli matrices

$$\sigma_1 = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}, \quad \sigma_2 = \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix},$$

$$\sigma_3 = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}, \quad \sigma_0 = I = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}.$$

The real expansion coefficients $P_{\mu_1 \dots \mu_n}(t)$ are given by

$$P_{\mu_1 \dots \mu_n}(t) = \text{Tr}(\sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n} \rho(t)).$$

Normalization ($\text{Tr} \rho = 1$) requires that $P_{0 \dots 0}(t) = 1$. Since the eigenvalues of the Pauli matrices are ± 1 , the expansion coefficients satisfy $|P_{\mu_1 \dots \mu_n}(t)| \leq 1$. Let us rewrite (2) in the form:

$$\rho(t) = \frac{1}{2^n} \sum_{\mu=0}^{N-1} \sigma_{\mu} P_{\mu}(t),$$

where $\sigma_{\mu} = \sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n}$, $\mu = (\mu_1 \dots \mu_n)$ and $N = 4^n$.

An arbitrary general one-qubit state $\rho(t)$ can be represented as

$$\rho(t) = \frac{1}{2} \sum_{\mu=0}^3 \sigma_{\mu} P_{\mu}(t),$$

where $P_{\mu}(t) = \text{Tr}(\sigma_{\mu} \rho(t))$ and $P_0(t) = 1$. The pure state can be identified with Bloch sphere

$$P_1^2(t) + P_2^2(t) + P_3^2(t) = 1.$$

The mixed state can be identified with close ball

$$P_1^2(t) + P_2^2(t) + P_3^2(t) \leq 1.$$

Not all linear combinations of quantum states $\rho_j(t)$ are states. The operator

$$\rho(t) = \sum_j \lambda_j \rho_j(t)$$

is a state iff $\sum_j \lambda_j = 1$.

III Liouville space and superoperators

For the concept of Liouville space and superoperators see [28]-[54].

III.1 Liouville space

The space of linear operators acting on a $N = 2^n$ -dimensional Hilbert space $\mathcal{H}^{(n)}$ is a $N^2 = 4^n$ -dimensional complex linear space $\overline{\mathcal{H}}^{(n)}$. We denote an element A of $\overline{\mathcal{H}}^{(n)}$ by a ket-vector $|A\rangle$. The inner product of two elements $|A\rangle$ and $|B\rangle$ of $\overline{\mathcal{H}}^{(n)}$ is defined as

$$\langle A|B\rangle = \text{Tr}(A^\dagger B). \quad (3)$$

The norm $\|A\| = \sqrt{\langle A|A\rangle}$ is the Hilbert-Schmidt norm of operator A . A new Hilbert space $\overline{\mathcal{H}}$ with scalar product (3) is called Liouville space attached to \mathcal{H} or the associated Hilbert space, or Hilbert-Schmidt space [28]-[54].

Let $\{|k\rangle\}$ be an orthonormal basis of $\mathcal{H}^{(n)}$:

$$\langle k|k'\rangle = \delta_{kk'}, \quad \sum_{k=0}^{N-1} |k\rangle\langle k| = I.$$

Then $|k, l\rangle = ||k\rangle\langle l|$ is an orthonormal basis of the Liouville space $\overline{\mathcal{H}}^{(n)}$:

$$\langle k, l|k', l'\rangle = \delta_{kk'} \delta_{ll'}, \quad \sum_{k=0}^{N-1} \sum_{l=0}^{N-1} |k, l\rangle\langle k, l| = \hat{I}, \quad (4)$$

where $N = 2^n$. This operator basis has 4^n elements. Note that $|k, l\rangle \neq |kl\rangle = |k\rangle \otimes |l\rangle$ and

$$|k, l\rangle = |k_1, l_1\rangle \otimes |k_2, l_2\rangle \otimes \dots \otimes |k_n, l_n\rangle, \quad (5)$$

where $k_i, l_i \in \{0, 1\}$, $i = 1, \dots, n$ and

$$|k_i, l_i\rangle \otimes |k_j, l_j\rangle = |k_i \otimes k_j, l_i \otimes l_j\rangle.$$

For an arbitrary element $|A\rangle$ of $\overline{\mathcal{H}}^{(n)}$ we have

$$|A\rangle = \sum_{k=0}^{N-1} \sum_{l=0}^{N-1} |k, l\rangle \langle k, l|A\rangle \quad (6)$$

with

$$\langle k, l|A\rangle = \text{Tr}(|l\rangle\langle k|A) = \langle k|A|l\rangle = A_{kl}.$$

An operator $\rho(t)$ of density matrix for n-qubits can be considered as an element $|\rho(t)\rangle$ of the space $\overline{\mathcal{H}}^{(n)}$. From (6) we get

$$|\rho(t)\rangle = \sum_{k=0}^{N-1} \sum_{l=0}^{N-1} |k, l\rangle \langle k, l|\rho(t)\rangle, \quad (7)$$

where $N = 2^n$ and

$$\sum_{k=0}^{N-1} \langle k, k|\rho(t)\rangle = 1.$$

III.2 Superoperators

Operators, which act on $\overline{\mathcal{H}}$, are called superoperators and we denote them in general by the hat.

For an arbitrary superoperator $\hat{\Lambda}$ on $\overline{\mathcal{H}}$, which is defined by

$$\hat{\Lambda}|A\rangle = |\Lambda(A)\rangle,$$

we have

$$\begin{aligned} \langle k, l|\hat{\Lambda}|A\rangle &= \sum_{k'=0}^{N-1} \sum_{l'=0}^{N-1} \langle k, l|\hat{\Lambda}|k', l'\rangle \langle k', l'|A\rangle = \\ &= \sum_{k'=0}^{N-1} \sum_{l'=0}^{N-1} \Lambda_{klk'l'} A_{k'l'}, \end{aligned}$$

where $N = 2^n$.

Let A be a linear operator in Hilbert space. Then the superoperators \hat{L}_A and \hat{R}_A will be defined by

$$\hat{L}_A|B\rangle = |AB\rangle, \quad \hat{R}_A|B\rangle = |BA\rangle.$$

In the basis $|k, l\rangle$ we have

$$\begin{aligned} (k, l | \hat{L}_A | B) &= \sum_{k'=0}^{N-1} \sum_{l'=0}^{N-1} (k, l | \hat{L}_A | k', l') (k', l' | B) = \\ &= \sum_{k'=0}^{N-1} \sum_{l'=0}^{N-1} (\hat{L}_A)_{klk'l'} \langle k' | B | l' \rangle, \end{aligned}$$

Note that

$$\begin{aligned} (k, l | AB) &= \langle k | AB | l \rangle = \\ &= \sum_{k'=0}^{N-1} \sum_{l'=0}^{N-1} \langle k | A | k' \rangle \langle k' | B | l' \rangle \langle l' | l \rangle. \end{aligned}$$

Finally, we obtain

$$(\hat{L}_A)_{klk'l'} = \langle k | A | k' \rangle \langle l' | l \rangle = A_{kk'} \delta_{ll'}.$$

The superoperator $\hat{P} = |A\rangle\langle B|$ is defined by

$$\hat{P}|C\rangle = |A\rangle\langle B|C\rangle = |A\rangle \text{Tr}(B^\dagger C).$$

A superoperator $\hat{\mathcal{E}}^\dagger$ is called the adjoint superoperator for $\hat{\mathcal{E}}$ if

$$(\hat{\mathcal{E}}^\dagger(A) | B) = (A | \hat{\mathcal{E}}(B))$$

for all $|A\rangle$ and $|B\rangle$ from $\overline{\mathcal{H}}$. For example, if $\hat{\mathcal{E}} = \hat{L}_A \hat{R}_B$, then $\hat{\mathcal{E}}^\dagger = \hat{L}_{A^\dagger} \hat{R}_{B^\dagger}$. If $\hat{\mathcal{E}} = \hat{L}_A$, then $\hat{\mathcal{E}}^\dagger = \hat{L}_{A^\dagger}$. If $\hat{\mathcal{E}} = \hat{L}_A \hat{R}_{A^\dagger}$, then $\hat{\mathcal{E}}^\dagger = \hat{L}_{A^\dagger} \hat{R}_A$.

A superoperator $\hat{\mathcal{E}}$ is called unital if $\hat{\mathcal{E}}|I\rangle = |I\rangle$.

IV Generalized computational basis and ququats

Let us introduce generalized computational basis and generalized computational states for 4^n -dimensional operator Hilbert space (Liouville space).

IV.1 Pauli representation

Pauli matrices (II.2) can be considered as a basis in operator space. Let us write the Pauli matrices (II.2) in the form

$$\sigma_1 = |0\rangle\langle 1| + |1\rangle\langle 0| = |0, 1\rangle + |1, 0\rangle,$$

$$\sigma_2 = -i|0\rangle\langle 1| + i|1\rangle\langle 0| = -i(|0, 1\rangle - |1, 0\rangle),$$

$$\sigma_3 = |0\rangle\langle 0| - |1\rangle\langle 1| = |0, 0\rangle - |1, 1\rangle,$$

$$\sigma_0 = I = |0\rangle\langle 0| + |1\rangle\langle 1| = |0, 0\rangle + |1, 1\rangle.$$

Let us use the formulas

$$|0, 0\rangle = \frac{1}{2}(|\sigma_0\rangle + |\sigma_3\rangle), \quad |1, 1\rangle = \frac{1}{2}(|\sigma_0\rangle - |\sigma_3\rangle),$$

$$|0, 1\rangle = \frac{1}{2}(|\sigma_1\rangle + i|\sigma_2\rangle), \quad |1, 0\rangle = \frac{1}{2}(|\sigma_1\rangle - i|\sigma_2\rangle).$$

It allows to rewrite operator basis

$$|k, l\rangle = |k_1, l_1\rangle \otimes |k_2, l_2\rangle \otimes \dots \otimes |k_n, l_n\rangle$$

by complete basis operators

$$|\sigma_\mu\rangle = |\sigma_{\mu_1}\rangle \otimes |\sigma_{\mu_2}\rangle \otimes \dots \otimes |\sigma_{\mu_n}\rangle,$$

where $\mu_i = 2k_i + l_i$, i.e. $\mu_i \in \{0, 1, 2, 3\}$ and $i = 1, \dots, n$. The basis $|\sigma_\mu\rangle$ is orthogonal

$$(\sigma_\mu | \sigma_{\mu'}) = 2^n \delta_{\mu\mu'}$$

and complete operator basis

$$\frac{1}{2^n} \sum_{\mu}^{N-1} |\sigma_\mu\rangle\langle \sigma_\mu| = \hat{I}.$$

For an arbitrary element $|A\rangle$ of $\overline{\mathcal{H}}^{(n)}$ we have Pauli representation by

$$|A\rangle = \frac{1}{2^n} \sum_{\mu=0}^{N-1} |\sigma_\mu\rangle (\sigma_\mu | A)$$

with the complex coefficients

$$(\sigma_\mu | A) = \text{Tr}(\sigma_\mu A).$$

We can rewrite formulas (2) using the complete operator basis $|\sigma_\mu\rangle$ in Liouville space $\overline{\mathcal{H}}^{(n)}$:

$$|\rho(t)\rangle = \frac{1}{2^n} \sum_{\mu=0}^{N-1} |\sigma_\mu\rangle (\sigma_\mu | \rho(t)),$$

where $\sigma_\mu = \sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n}$, $\mu = (\mu_1 \dots \mu_n)$ and $(\sigma_\mu | \rho(t)) = P_\mu(t)$.

The density matrix operator $\rho(t)$ is a self-adjoint operator with unit trace. It follows that

$$P_\mu^*(t) = P_\mu(t), \quad P_0(t) = (\sigma_0 | \rho(t)) = 1.$$

In general case,

$$\frac{1}{2^n} \sum_{\mu=0}^{N-1} P_\mu^2(t) = (\rho(t) | \rho(t)) = \text{Tr} \rho^2(t) \leq 1.$$

Note that Schwarz inequality

$$|(A | B)|^2 \leq (A | A)(B | B)$$

leads to

$$|(I | \rho(t))|^2 \leq (I | I)(\rho(t) | \rho(t)),$$

$$1 = |\text{Tr} \rho(t)|^2 \leq 2^n (\rho(t) | \rho(t)) = \sum_{\mu=0}^{N-1} P_\mu^2(t),$$

i.e.

$$\frac{1}{\sqrt{2^n}} \leq \text{Tr}(\rho^2(t)) \leq 1 \quad \text{or} \quad 1 \leq \sum_{\mu=0}^{N-1} P_\mu^2(t) \leq 2^n.$$

An arbitrary general one-qubit state $\rho(t)$ can be represented in Liouville space $\overline{\mathcal{H}}_2$ as

$$|\rho(t)\rangle = \frac{1}{2} \sum_{\mu=0}^3 |\sigma_\mu\rangle P_\mu(t),$$

where $P_\mu = \langle \sigma_\mu | \rho \rangle$, $P_0 = 1$ and $P_1^2(t) + P_2^2(t) + P_3^2(t) \leq 1$. Note that the basis $|\sigma_\mu\rangle$ is orthogonal, but is not orthonormal.

IV.2 Generalized computational basis

Let us define the orthonormal basis $|\mu\rangle$ of Liouville space $\overline{\mathcal{H}}^{(n)}$. In general case, the state $\rho(t)$ of the n-qubits system is an element of Hilbert space $\overline{\mathcal{H}}^{(n)}$. The basis for $\overline{\mathcal{H}}^{(n)}$ consists of the $N^2 = 2^{2n} = 4^n$ orthonormal basis elements denoted by $|\mu\rangle$.

Definition A basis of Liouville space $\overline{\mathcal{H}}^{(n)}$ is defined by

$$|\mu\rangle = |\mu_1 \dots \mu_n\rangle = \frac{1}{\sqrt{2^n}} |\sigma_\mu\rangle = \frac{1}{\sqrt{2^n}} |\sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n}\rangle,$$

where each $\mu_i \in \{0, 1, 2, 3\}$ and

$$\langle \mu | \mu' \rangle = \delta_{\mu\mu'}, \quad \sum_{\mu=0}^{N-1} |\mu\rangle \langle \mu| = \hat{I},$$

is called a **generalized computational basis**.

Here μ is 4-valued representation of

$$\mu = \mu_1 4^{n-1} + \dots + \mu_{n-1} 4 + \mu_n.$$

Example. In general case, one-qubit state $\rho(t)$ of open quantum system is

$$|\rho\rangle = |0\rangle \frac{1}{\sqrt{2}} + |1\rangle \rho_1 + |2\rangle \rho_2 + |3\rangle \rho_3,$$

where *four* orthonormal basis elements are

$$|0\rangle = \frac{1}{\sqrt{2}} |\sigma_0\rangle = \frac{1}{\sqrt{2}} |I\rangle, \quad |1\rangle = \frac{1}{\sqrt{2}} |\sigma_1\rangle,$$

$$|2\rangle = \frac{1}{\sqrt{2}} |\sigma_2\rangle, \quad |3\rangle = \frac{1}{\sqrt{2}} |\sigma_3\rangle.$$

Example. Two-qubit state $\rho(t)$ is an element of 16-dimensional Hilbert space with the orthonormal basis

$$|00\rangle = \frac{1}{2} |I \otimes I\rangle, \quad |0k\rangle = \frac{1}{2} |I \otimes \sigma_k\rangle,$$

$$|k0\rangle = \frac{1}{2} |\sigma_k \otimes I\rangle, \quad |kl\rangle = \frac{1}{2} |\sigma_k \otimes \sigma_l\rangle,$$

where $k, l \in \{1, 2, 3\}$.

The usual computational basis $\{|k\rangle\}$ is not a basis of general state $\rho(t)$ which has a time dependence. In general case, a pure state evolves to mixed state.

Pure state of n two-level closed quantum systems is an element of 2^n -dimensional functional Hilbert space $\mathcal{H}^{(n)}$. It leads to quantum computer model with 2-valued logic. *In general case, the mixed state $\rho(t)$ of n two-level (open or closed) quantum system is an element of 4^n -dimensional operator Hilbert space $\overline{\mathcal{H}}^{(n)}$ (Liouville space). It leads to 4-valued logic model for quantum computer.*

The state of the quantum computation at any point time is a superposition of basis elements

$$|\rho(t)\rangle = \sum_{\mu=0}^{N-1} |\mu\rangle \rho_\mu(t),$$

where $\rho_\mu(t)$ are real numbers (functions) satisfying normalized condition $\rho_0(t) = 1/\sqrt{2^n}$, i.e.

$$\sqrt{2^n} \langle 0 | \rho(t) \rangle = \text{Tr}(\rho(t)) = 1.$$

Any state $|\rho(t)\rangle$ for basis element $|0\dots 0\rangle$ has $P_{0\dots 0} = 1$ in all cases.

IV.3 Generalized computational states

Generalized computational basis elements $|\mu\rangle$ are not quantum states for $\mu \neq 0$. It follows from normalized condition $\langle 0 | \rho(t) \rangle = 1/\sqrt{2}$. The general quantum state in Pauli representation (2) has the form

$$|\rho(t)\rangle = \frac{1}{2^n} \sum_{\mu=0}^{N-1} |\sigma_\mu\rangle P_\mu(t),$$

where $P_0(t) = 1$ in all cases. Let us define simple computational quantum states.

Definition A quantum states in Liouville space defined by

$$|\mu\rangle = \frac{1}{2^n} \left(|\sigma_0\rangle + |\sigma_\mu\rangle (1 - \delta_{\mu 0}) \right)$$

or

$$|\mu\rangle = \frac{1}{\sqrt{2^n}} \left(|0\rangle + |\mu\rangle (1 - \delta_{\mu 0}) \right).$$

is called **generalized computational states**.

Note that all states $|\mu\rangle$, where $\mu \neq 0$, are pure states, since $\langle \mu | \mu \rangle = 1$. The state $|0\rangle$ is maximally mixed state. The states $|\mu\rangle$ are elements of Liouville space $\overline{\mathcal{H}}^{(n)}$.

Quantum state in a 4-dimensional Hilbert space is usually called ququat or qu-quart[55] or qudit [56, 57, 58, 59, 60] with $D = 4$. Usually ququat is considered as 4-level quantum system. We consider ququat as general quantum state in a 4-dimensional operator Hilbert space.

Definition A quantum state in 4-dimensional operator Hilbert space (Liouville space) $\overline{\mathcal{H}}^{(1)}$ associated with single qubit of $\mathcal{H}^{(1)} = \mathcal{H}_2$ is called **single ququat**. A quantum state in 4^n -dimensional Liouville space $\overline{\mathcal{H}}^{(n)}$ associated with n-qubits system is called **n-ququats**.

Example. For the single ququat the states $|\mu\rangle$ are

$$|0\rangle = \frac{1}{2}|\sigma_0\rangle, \quad |k\rangle = \frac{1}{2}\left(|\sigma_0\rangle + |\sigma_k\rangle\right),$$

or

$$|0\rangle = \frac{1}{\sqrt{2}}|0\rangle, \quad |k\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + |k\rangle\right).$$

It is convenient to use matrices for quantum states. In **matrix representation** the single ququat computational basis $|\mu\rangle$ and computational states $|\mu\rangle$ can be represented by

$$|0\rangle = \begin{pmatrix} 1 \\ 0 \\ 0 \\ 0 \end{pmatrix}, |1\rangle = \begin{pmatrix} 0 \\ 1 \\ 0 \\ 0 \end{pmatrix}, |2\rangle = \begin{pmatrix} 0 \\ 0 \\ 1 \\ 0 \end{pmatrix}, |3\rangle = \begin{pmatrix} 0 \\ 0 \\ 0 \\ 1 \end{pmatrix}.$$

In this representation single qubit generalized computational states $|\mu\rangle$ is represented by

$$|0\rangle = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 0 \\ 0 \\ 0 \end{pmatrix}, \quad |1\rangle = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 1 \\ 0 \\ 0 \end{pmatrix},$$

$$|2\rangle = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 0 \\ 1 \\ 0 \end{pmatrix}, \quad |3\rangle = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 0 \\ 0 \\ 1 \end{pmatrix}.$$

A general single ququat quantum state $|\rho\rangle = \sum_{\mu=0}^{N-1} |\mu\rangle\rho_{\mu}$ is represented

$$|\rho\rangle = \begin{pmatrix} \rho_0 \\ \rho_1 \\ \rho_2 \\ \rho_3 \end{pmatrix},$$

where $\rho_0 = 1/\sqrt{2}$ and $\rho_1^2 + \rho_2^2 + \rho_3^2 \leq \sqrt{2}$.

We can use the other matrix representation for the states $|\rho\rangle$ which has no the coefficient $1/\sqrt{2^n}$. In this representation single qubit generalized computational states $|\mu\rangle$ is represented by

$$|0\rangle = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}, |1\rangle = \begin{bmatrix} 1 \\ 1 \\ 0 \\ 0 \end{bmatrix}, |2\rangle = \begin{bmatrix} 1 \\ 0 \\ 1 \\ 0 \end{bmatrix}, |3\rangle = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 1 \end{bmatrix}.$$

A general single ququat quantum state

$$|\rho\rangle = \begin{bmatrix} 1 \\ P_1 \\ P_2 \\ P_3 \end{bmatrix},$$

where $P_1^2 + P_2^2 + P_3^2 \leq 1$, is a superposition of generalized computational states

$$|\rho\rangle = |0\rangle(1 - P_1 - P_2 - P_3) + |1\rangle P_1 + |2\rangle P_2 + |3\rangle P_3.$$

Note that density matrix operator ρ as an element of Liouville space is represented by $|\rho\rangle$ and $|\rho\rangle$. We use different brackets only to emphasize the different matrix representations connected by coefficient $1/\sqrt{2^n}$. This coefficient can be neglected under the consideration of the quantum 4-valued logic gates.

V Evolution equations and quantum operations

In this section I review the description of open quantum systems dynamics in terms of evolution equations and quantum operations.

V.1 Evolution equation for pure state of closed systems

Let H be the Hamilton operator, then in the Schroedinger picture the equation of motion for the pure state $|\Psi(t)\rangle$ of closed system is given by the Schroedinger equation

$$\frac{d}{dt}|\Psi(t)\rangle = -iH|\Psi(t)\rangle. \quad (8)$$

The change in the state $|\Psi(t)\rangle$ of a closed quantum system between two fixed times t and t_0 is described by a unitary operator $U(t, t_0)$ which depends on those times

$$|\Psi(t)\rangle = U(t, t_0)|\Psi(t_0)\rangle.$$

If the Hamilton operator H has no time dependence, then the unitary operator $U(t, t_0)$ has the form

$$U(t, t_0) = \exp\{-i(t - t_0)H\}.$$

In general case, the unitary operator $U(t, t_0)$ is defined by

$$\frac{d}{dt}U(t, t_0) = -iHU(t, t_0), \quad U(t_0, t_0) = I.$$

A pure state $|\Psi\rangle \in \mathcal{H}^{(n)}$ of closed n-qubits system is generally a superposition of the orthonormal basis states $|k\rangle$

$$|\Psi(t)\rangle = \sum_k a_k(t)|k\rangle.$$

Let the Hamilton operator H on the space $\mathcal{H}^{(n)}$ can be written in the form

$$H = \sum_{l,m} H_{lm}|l\rangle\langle m|.$$

Then equation (8) can be given in the form

$$\frac{d}{dt}a_k(t) = -i \sum_l H_{kl}a_l(t).$$

V.2 Evolution equation for mixed state of closed system

Let H be the Hamiltonian, then in the Schroedinger picture the evolution equation for the mixed state $\rho(t)$ of closed system is given by the von Neumann equation

$$\frac{d}{dt}\rho(t) = -i[H, \rho(t)]. \quad (9)$$

This equation can be rewritten by

$$\frac{d}{dt}|\rho(t)\rangle = \hat{\Lambda}|\rho(t)\rangle,$$

where the Liouville superoperator $\hat{\Lambda}$ is given by

$$\hat{\Lambda} = -i(\hat{L}_H - \hat{R}_H).$$

A change of pure and mixed states of closed (Hamiltonian) quantum system is the unitary evolution. The final state $\rho(t)$ of the system is related to the initial state $\rho(t = t_0) = \rho$ by unitary transformation $U = U(t, t_0)$:

$$\rho \rightarrow \rho(t) = \mathcal{U}_t(\rho) = U\rho U^\dagger, \quad (10)$$

where $UU^\dagger = I$. The superoperator $\hat{\mathcal{U}}$ is written in the form $\hat{\mathcal{U}} = \hat{L}_U \hat{R}_U$: $|\rho(t)\rangle = \hat{\mathcal{U}}_t|\rho\rangle$.

V.3 Evolution equation for mixed state of open system

A classification of norm continuous (or, equivalently, with bounded generators) dynamical semigroup [66] of the Bahach space of trace-class operators on \mathcal{H} , has been given by Lindblad ([62]). The general form of the generator $\hat{\Lambda}$ of such a semigroup is the following

$$\hat{\Lambda}\rho = -i[H, \rho] + \Phi(\rho) - \Phi(I) \circ \rho, \quad (11)$$

where

$$\Phi(B) = \sum_j V_j B V_j^\dagger, \quad A \circ B = \frac{1}{2}(AB + BA).$$

Here H is a bounded self-adjoint Hamilton operator, $\{V_j\}$ is a sequence of bounded operators, $\Phi(I)$ is a bounded operator. The evolution equation has the form

$$\frac{d}{dt}\rho(t) = -i[H, \rho(t)] + \sum_j \left(V_j \rho(t) V_j^\dagger - \rho(t) \circ (V_j V_j^\dagger) \right). \quad (12)$$

For the proofs of (11) and (12), we refer to [62, 66]. Using equation (12) evolution equation for the mixed state $|\rho(t)\rangle$ can be written by

$$\frac{d}{dt}|\rho(t)\rangle = \hat{\Lambda}|\rho(t)\rangle,$$

where the Liouville superoperator $\hat{\Lambda}$ is given by

$$\hat{\Lambda} = -i(\hat{L}_H - \hat{R}_H) + \frac{1}{2} \sum_j \left(2\hat{L}_{V_j} \hat{R}_{V_j^\dagger} - \hat{L}_{V_j} \hat{L}_{V_j^\dagger} - \hat{R}_{V_j^\dagger} \hat{R}_{V_j} \right), \quad \text{and } \varepsilon_{klm} \varepsilon_{ijm} = \delta_{ki} \delta_{lj} - \delta_{kj} \delta_{li}, \quad \text{for (13) we obtain the equations:}$$

In the case of a n-level system ($\dim \mathcal{H} = n$), evolution equation (12) can be given in the form [61]:

$$\frac{d}{dt}\rho(t) = -i[H, \rho(t)] + \sum_{k,l=1}^{n^2-1} C_{kl} \left(F_k \rho(t) F_l^\dagger - \rho(t) \circ (F_k F_l^\dagger) \right),$$

where

$$H^\dagger = H, \quad Tr(H) = 0, \quad Tr(F_k) = 0, \quad Tr(F_k^\dagger F_l) = \delta_{kl},$$

The matrix $\{C_{kl}\}$ is a positive matrix $(n^2 - 1) \times (n^2 - 1)$ and $\{I, F_k | k = 1, \dots, n^2 - 1\}$ is an operator basis for the space of bounded operators on \mathcal{H}_n . The matrix $\{C_{kl}\}$ is called a positive matrix if all elements C_{kl} are real ($C_{kl}^* = C_{kl}$) and positive $C_{kl} > 0$. For the proofs of (13), we refer to [61].

For a given $\hat{\Lambda}$, operator H is uniquely determined by the condition $Tr(H) = 0$, and the matrix $\{C_{kl}\}$ is uniquely determined by the choice of the F_k . The conditions $Tr(H) = 0$ and $Tr(F_k) = 0$ provide a canonical separation of the superoperator $\hat{\Lambda}$ into a Hamiltonian plus dissipative part.

If the condition of completely positivity is replaced by the weaker requirement of simple positivity, the generator for a n-level system can be again be written in the form (13), where the matrix $\{C_{kl}\}$ is a matrix of positive defined Hermitian form [67, 63], i.e.

$$\sum_{kl=1}^{n^2-1} C_{kl} z_k z_l^* > 0,$$

for all $z_k \in \mathbb{C}$. The matrix $\{C_{kl}\}$ of Hermitian form is Hermitian matrix ($C_{kl}^* = C_{lk}$). It is known [85] that Hermitian form is positive if and only if

$$\det \begin{pmatrix} C_{11} & C_{12} & \dots & C_{1k} \\ C_{21} & C_{22} & \dots & C_{2k} \\ \vdots & \dots & \dots & \dots \\ C_{k1} & C_{k2} & \dots & C_{kk} \end{pmatrix} > 0,$$

for all $k = 1, 2, \dots, n^2 - 1$. This condition is equivalent to condition of positivity for matrix eigenvalues.

Let us consider a two-level quantum system (qubit) [61, 62, 63, 64, 65] for a positive trace-preserving semigroup. Let $\{F_\mu\}$, where $\mu \in \{0, 1, 2, 3\}$, be a complete orthonormal set of self-adjoint matrices:

$$F_0 = \frac{1}{\sqrt{2}}I, \quad F_1 = \frac{1}{2}\sigma_1, \quad F_2 = \frac{1}{\sqrt{2}}\sigma_2, \quad F_3 = \frac{1}{\sqrt{2}}\sigma_3.$$

Let Hamilton operator H and state $\rho(t)$ have the form

$$H = \sum_{k=1}^3 H_k \sigma_k, \quad \rho(t) = \frac{1}{2}(P_0 I + P_k(t) \sigma_k),$$

where $P_0 = 1$ in all cases. Using the relations

$$\sigma_k \sigma_l = I \delta_{kl} + i \sum_{m=1}^3 \varepsilon_{klm} \sigma_m, \quad [\sigma_k, \sigma_l] = 2i \sum_{m=1}^3 \varepsilon_{klm} \sigma_m,$$

and $\varepsilon_{klm} \varepsilon_{ijm} = \delta_{ki} \delta_{lj} - \delta_{kj} \delta_{li}$, for (13) we obtain the equations:

$$\frac{d}{dt}P_k(t) = \sum_{l=1}^3 \left(2H_m \varepsilon_{kml} + \frac{1}{8}(C_{kl} + C_{lk}) - \frac{1}{4}C\delta_{kl} \right) P_l(t) -$$

$$-\frac{1}{4}\varepsilon_{ijk}(ImC_{ij})P_0,$$

(13) where $C = \sum_{m=1}^3 C_{mm}$ and $k, l \in \{1, 2, 3\}$. We can rewrite this equation in the form

$$\frac{d}{dt}P_\mu(t) = \sum_{\nu=0}^3 \mathcal{L}_{\mu\nu} P_\nu(t), \quad (14)$$

where $\mu, \nu \in \{0, 1, 2, 3\}$ and the matrix $\mathcal{L}_{\mu\nu}$ is

$$\begin{pmatrix} 0 & 0 & 0 & 0 \\ B_1 & -C_{(22)} - C_{(33)} & C_{(12)} - 2H_3 & C_{(13)} + 2H_2 \\ B_2 & C_{(12)} + 2H_3 & -C_{(11)} - C_{(33)} & C_{(23)} - 2H_1 \\ B_3 & C_{(13)} - 2H_2 & C_{(23)} + 2H_1 & -C_{(11)} - C_{(22)} \end{pmatrix},$$

where

$$B_k = -\frac{1}{4}\varepsilon_{ijk}(ImC_{ij}), \quad C_{(kl)} = \frac{1}{8}(C_{kl} + C_{lk}).$$

If the matrix C_{kl} and Hamilton operator H are not time-dependent, then equation (14) has a solution

$$P_\mu(t) = \sum_{\nu=0}^3 \mathcal{E}_{\mu\nu}(t, t_0) P_\nu(t_0),$$

where the matrix $\mathcal{E}_{\mu\nu}$ is

$$\mathcal{E} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ T_1 & R_{11} & R_{12} & R_{13} \\ T_2 & R_{21} & R_{22} & R_{23} \\ T_3 & R_{31} & R_{32} & R_{33} \end{pmatrix}.$$

The matrices T and R of the matrix $\mathcal{E}_{\mu\nu}$ are defined by

$$T = (e^{\tau A} - I)(\tau A)^{-1} B = \sum_{n=0}^{\infty} \frac{\tau^{n-1}}{n!} A^{n-1},$$

$$R = e^{\tau A} = \sum_{n=0}^{\infty} \frac{\tau^n}{n!} A^n,$$

where $\tau = t - t_0$ and elements of the matrix A are

$$A_{kl} = 2H_m \varepsilon_{kml} + \frac{1}{8}(C_{kl} + C_{lk}) - \frac{1}{4}C\delta_{kl}.$$

If C_{kl} is a real matrix, then all $T_k = 0$, where $k = 1, 2, 3$.

V.4 Quantum operation

Unitary evolution (10) is not the most general type of state change possible for quantum systems. A most general state change of a quantum system is a positive map \mathcal{E} which is called a quantum operation or superoperator. For the concept of quantum operations see [68, 69, 70, 71, 4]. In the formalism of quantum operations the final (output) state ρ' is related to the initial (output) state ρ by a map

$$\rho \rightarrow \rho' = \frac{\mathcal{E}(\rho)}{Tr(\mathcal{E}(\rho))}. \quad (15)$$

The trace in the denominator is induced in order to preserve the trace condition, $Tr(\rho') = 1$. In general case, this denominator leads to the map is nonlinear, where the map \mathcal{E} is a linear positive map.

The quantum operation \mathcal{E} usually considered as a completely positive map [66]. The most general form for completely positive quantum operation \mathcal{E} is

$$\mathcal{E}(\rho) = \sum_{j=1}^m A_j \rho A_j^\dagger.$$

By definition, $Tr(\mathcal{E}(\rho))$ is the probability that the process represented by \mathcal{E} occurs, when ρ is the initial state. The probability never exceed 1. The quantum operation \mathcal{E} is trace-decreasing, i.e. $Tr(\mathcal{E}(\rho)) \leq 1$ for all density matrix operators ρ . This condition can be expressed as an operator inequality for A_j . The operators A_j must satisfy

$$\sum_{j=1}^m A_j^\dagger A_j \leq I.$$

The normalized post-dynamics system state is defined by (15). The map (15) is nonlinear trace-preserving map. If the linear quantum operation \mathcal{E} is trace-preserving $Tr(\mathcal{E}(\rho)) = 1$, then

$$\sum_{j=1}^m A_j^\dagger A_j = I.$$

Notice that a trace-preserving quantum operation $\mathcal{E}(\rho) = A\rho A^\dagger$ must be a unitary transformation ($A^\dagger A = AA^\dagger = I$).

The example of nonunitary dynamics is associated with the measurement of quantum system. The system being measured is no longer a closed system, since it is interacting with the measuring device. The usual way [2] to describe a measurement (von Neumann measurement) is a set of projectors P_k onto the pure state space of the system such that

$$P_k P_l = \delta_{kl} P_k, \quad P_k^\dagger = P_k, \quad \sum_k P_k = I.$$

The unnormalized state of the system after the measurement is given by

$$\mathcal{E}_k(\rho) = P_k \rho P_k.$$

The probability of this measurement result is given by

$$p(k) = Tr(\mathcal{E}_k(\rho)).$$

The normalization condition, $\sum_k p(k) = 1$ for all density matrix operators, is equivalent to the completeness condition $\sum_k P_k = I$. If the state of the system before the measurement was ρ , then the normalized state of the system after the measurement is

$$\rho' = p^{-1}(k) \mathcal{E}_k(\rho).$$

VI Quantum four-valued logic gates

In this section we consider some properties of four-valued logic gates. We connect quantum four-valued logic gates with unitary two-valued logic gates and quantum operations by the generalized computational basis.

VI.1 Generalized quantum gates

Quantum operations can be considered as generalized quantum gates act on general (mixed) states. Let us define a quantum 4-valued logic gates.

Definition *Quantum four-valued logic gate is a superoperator $\hat{\mathcal{E}}$ on Liouville space $\overline{\mathcal{H}}^{(n)}$ which maps a density matrix*

operator $|\rho\rangle$ of n -ququats to a density matrix operator $|\rho'\rangle$ of n -ququats.

A generalized quantum gate is a superoperator $\hat{\mathcal{E}}$ which maps density matrix operator $|\rho\rangle$ to density matrix operator $|\rho'\rangle$. If ρ is operator of density matrix, then $\hat{\mathcal{E}}(\rho)$ should also be a density matrix operator. Any density matrix operator is self-adjoint ($\rho^\dagger(t) = \rho(t)$), positive ($\rho(t) > 0$) operator with unit trace ($Tr\rho(t) = 1$). Therefore we have some requirements for superoperator $\hat{\mathcal{E}}$.

The requirements for a superoperator $\hat{\mathcal{E}}$ to be a generalized quantum gate are as follows:

1. The superoperator $\hat{\mathcal{E}}$ is *real* superoperator, i.e. $(\hat{\mathcal{E}}(A))^\dagger = \hat{\mathcal{E}}(A^\dagger)$ for all A or $(\hat{\mathcal{E}}(\rho))^\dagger = \hat{\mathcal{E}}(\rho)$. Real superoperator $\hat{\mathcal{E}}$ maps self-adjoint operator ρ into self-adjoint operator $\hat{\mathcal{E}}(\rho)$: $(\hat{\mathcal{E}}(\rho))^\dagger = \hat{\mathcal{E}}(\rho)$.

2.1. The gate $\hat{\mathcal{E}}$ is a *positive* superoperator, i.e. $\hat{\mathcal{E}}$ maps positive operators to positive operators: $\hat{\mathcal{E}}(A^2) > 0$ for all $A \neq 0$ or $\hat{\mathcal{E}}(\rho) \geq 0$.

2.2. We have to assume the superoperator $\hat{\mathcal{E}}$ to be not merely positive but completely positive. The superoperator $\hat{\mathcal{E}}$ is *completely positive* map of Liouville space, i.e. the positivity is remained if we extend the Liouville space $\overline{\mathcal{H}}^{(n)}$ by adding more qubits. That is, the superoperator $\hat{\mathcal{E}} \otimes \hat{I}^{(m)}$ must be positive, where $\hat{I}^{(m)}$ is the identity superoperator on some Liouville space $\overline{\mathcal{H}}^{(m)}$.

3. The superoperator $\hat{\mathcal{E}}$ is *trace-preserving* map, i.e.

$$(I|\hat{\mathcal{E}}|\rho) = (\hat{\mathcal{E}}^\dagger(I)|\rho) = 1 \quad \text{or} \quad \hat{\mathcal{E}}^\dagger(I) = I.$$

3.1. The superoperator $\hat{\mathcal{E}}$ is a *convex linear* map on the set of density matrix operators, i.e.

$$\hat{\mathcal{E}}\left(\sum_s \lambda_s \rho_s\right) = \sum_s \lambda_s \hat{\mathcal{E}}(\rho_s),$$

where all λ_s are $0 < \lambda_s < 1$ and $\sum_s \lambda_s = 1$. Note that any convex linear map of density matrix operators can be uniquely extended to a *linear* map on Hermitian operators. Any linear completely positive superoperator can be represented by

$$\hat{\mathcal{E}} = \sum_j^m \hat{L}_{A_j} \hat{R}_{A_j^\dagger}.$$

If $\hat{\mathcal{E}}$ is trace-preserving superoperator, then

$$(I|\hat{\mathcal{E}}|\rho) = 1 \quad \text{or} \quad \hat{\mathcal{E}}^\dagger(I) = I.$$

3.2. The restriction to linear gates is unnecessary. Let us consider $\hat{\mathcal{E}}$ is a linear superoperator which is not trace-preserving. This superoperator is not a quantum gate. Let $(I|\hat{\mathcal{E}}|\rho) = Tr(\hat{\mathcal{E}}(\rho))$ is a probability that the process represented by the superoperator $\hat{\mathcal{E}}$ occurs. Since the probability is nonnegative and never exceed 1, it follows that the superoperator $\hat{\mathcal{E}}$ is a trace-decreasing superoperator:

$$0 \leq (I|\hat{\mathcal{E}}|\rho) \leq 1 \quad \text{or} \quad \hat{\mathcal{E}}^\dagger(I) \leq I.$$

In general case, the linear trace-decreasing superoperator is not a quantum four-valued logic gate, since it can be not trace-preserving. The generalized quantum gate can be defined as *nonlinear trace-preserving* gate $\hat{\mathcal{N}}$ by

$$\hat{\mathcal{N}}|\rho\rangle = (\hat{\mathcal{E}}|\rho)I|\hat{\mathcal{E}}|\rho\rangle^{-1} \quad \text{or} \quad \hat{\mathcal{N}}(\rho) = \frac{\hat{\mathcal{E}}(\rho)}{Tr(\hat{\mathcal{E}}(\rho))},$$

where $\hat{\mathcal{E}}$ is a linear completely positive trace-decreasing superoperator.

In the generalized computational basis the gate $\hat{\mathcal{E}}$ can be represented by

$$\hat{\mathcal{E}} = \frac{1}{2^n} \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} |\sigma_\mu\rangle \langle \sigma_\nu|.$$

where $N = 4^n$, μ and ν are 4-valued representation of

$$\mu = \mu_1 4^{N-1} + \dots + \mu_{N-1} 4 + \mu_N,$$

$$\nu = \nu_1 4^{N-1} + \dots + \nu_{N-1} 4 + \nu_N,$$

$$\sigma_\mu = \sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_m},$$

$\mu_i, \nu_i \in \{0, 1, 2, 3\}$ and $\mathcal{E}_{\mu\nu}$ are elements of some matrix.

VI.2 General quantum operation as four-valued logic gates

Proposition 1 *In the generalized computational basis $|\mu\rangle$ any linear two-valued logic quantum operation \mathcal{E} can be represented as a quantum four-valued logic gate $\hat{\mathcal{E}}$ defined by*

$$\hat{\mathcal{E}} = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} |\mu\rangle \langle \nu|,$$

where

$$\mathcal{E}_{\mu\nu} = \frac{1}{2^n} Tr\left(\sigma_\mu \hat{\mathcal{E}}(\sigma_\nu)\right),$$

and $\sigma_\mu = \sigma_{\mu_1} \otimes \dots \otimes \sigma_{\mu_n}$.

Proof. The state $\rho(t)$ in the generalized computational basis $|\mu\rangle$ has the form

$$|\rho(t)\rangle = \sum_{\mu=0}^{N-1} |\mu\rangle \rho_\mu(t),$$

where $N = 4^n$ and

$$\rho_\mu(t) = (\mu|\rho(t)) = \frac{1}{\sqrt{2^n}} Tr(\sigma_\mu \rho(t)).$$

The quantum operation \mathcal{E} define a four-valued logic gate by

$$|\rho(t)\rangle = \hat{\mathcal{E}}_t|\rho\rangle = |\mathcal{E}_t(\rho)\rangle = \sum_{\nu=0}^{N-1} |\mathcal{E}_t(\sigma_\nu)\rangle \frac{1}{\sqrt{2^n}} \rho_\nu(t_0).$$

Then

$$(\mu|\rho(t)) = \sum_{\nu=0}^{N-1} (\sigma_\mu|\mathcal{E}_t(\sigma_\nu)) \frac{1}{2^n} \rho_\nu(t_0).$$

Finally, we obtain

$$\rho_\mu(t) = \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} \rho_\nu(t_0),$$

where

$$\mathcal{E}_{\mu\nu} = \frac{1}{2^n} (\sigma_\mu|\mathcal{E}_t(\sigma_\nu)) = \frac{1}{2^n} \text{Tr}(\sigma_\mu \mathcal{E}_t(\sigma_\nu)).$$

This formula defines a relation between general quantum operation \mathcal{E} and the real $4^n \times 4^n$ matrix $\mathcal{E}_{\mu\nu}$ of four-valued logic gate $\hat{\mathcal{E}}$.

Four-valued logic gates $\hat{\mathcal{E}}$ in the matrix representation are represented by $4^n \times 4^n$ matrices $\mathcal{E}_{\mu\nu}$. The matrix $\mathcal{E}_{\mu\nu}$ of the gate $\hat{\mathcal{E}}$ is

$$\mathcal{E} = \begin{pmatrix} \mathcal{E}_{00} & \mathcal{E}_{01} & \dots & \mathcal{E}_{0a} \\ \mathcal{E}_{10} & \mathcal{E}_{11} & \dots & \mathcal{E}_{1a} \\ \dots & \dots & \dots & \dots \\ \mathcal{E}_{a0} & \mathcal{E}_{a1} & \dots & \mathcal{E}_{aa} \end{pmatrix},$$

where $a = N - 1 = 4^n - 1$.

In matrix representation the gate $\hat{\mathcal{E}}$ maps the state $|\rho\rangle = \sum_{\nu=0}^{N-1} |\nu\rangle \rho_\nu$ to the state $|\rho'\rangle = \sum_{\mu}^{N-1} |\mu\rangle \rho'_\mu$ by

$$\rho'_\mu = \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} \rho_\nu. \quad (16)$$

where $\rho'_0 = \rho_0 = 1/\sqrt{2^n}$. It can be written in the form

$$\begin{pmatrix} \rho'_0 \\ \rho'_1 \\ \dots \\ \rho'_a \end{pmatrix} = \begin{pmatrix} \mathcal{E}_{00} & \mathcal{E}_{01} & \dots & \mathcal{E}_{0a} \\ \mathcal{E}_{10} & \mathcal{E}_{11} & \dots & \mathcal{E}_{1a} \\ \dots & \dots & \dots & \dots \\ \mathcal{E}_{a0} & \mathcal{E}_{a1} & \dots & \mathcal{E}_{aa} \end{pmatrix} \begin{pmatrix} \rho_0 \\ \rho_1 \\ \dots \\ \rho_a \end{pmatrix}.$$

Since $P_\mu = \sqrt{2^n} \rho_\mu$ and $P'_\mu = \sqrt{2^n} \rho'_\mu$, it follows that representation (16) for linear gate $\hat{\mathcal{E}}$ is equivalent to

$$P'_\mu = \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} P_\nu. \quad (17)$$

It can be written in the form

$$\begin{bmatrix} P'_0 \\ P'_1 \\ \dots \\ P'_a \end{bmatrix} = \begin{pmatrix} \mathcal{E}_{00} & \mathcal{E}_{01} & \dots & \mathcal{E}_{0a} \\ \mathcal{E}_{10} & \mathcal{E}_{11} & \dots & \mathcal{E}_{1a} \\ \dots & \dots & \dots & \dots \\ \mathcal{E}_{a0} & \mathcal{E}_{a1} & \dots & \mathcal{E}_{aa} \end{pmatrix} \begin{bmatrix} P_0 \\ P_1 \\ \dots \\ P_a \end{bmatrix}.$$

where $P_0 = 1$. Note that if we use different matrix representation of state $|\rho\rangle$ or $|\rho'\rangle$ we can use identical matrices representation for gate $\hat{\mathcal{E}}$.

Proposition 2 *In the generalized computational basis $|\mu\rangle$ the matrix $\mathcal{E}_{\mu\nu}$ of general quantum four-valued logic gate*

$$\hat{\mathcal{E}} = \sum_{j=1}^m \hat{L}_{A_j} \hat{R}_{A_j^\dagger} \quad (18)$$

is real $\mathcal{E}_{\mu\nu}^* = \mathcal{E}_{\mu\nu}$.

Proof.

$$\mathcal{E}_{\mu\nu} = \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(\sigma_\mu A_j \sigma_\nu A_j^\dagger) = \frac{1}{2^n} \sum_{j=1}^m (A_j^\dagger \sigma_\mu | \sigma_\nu A_j^\dagger).$$

$$\begin{aligned} \mathcal{E}_{\mu\nu}^* &= \frac{1}{2^n} \sum_{j=1}^m (A_j^\dagger \sigma_\mu | \sigma_\nu A_j^\dagger)^* = \frac{1}{2^n} \sum_{j=1}^m (\sigma_\nu A_j^\dagger | A_j^\dagger \sigma_\mu) = \\ &= \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(A_j \sigma_\nu A_j^\dagger \sigma_\mu) = \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(\sigma_\mu A_j \sigma_\nu A_j^\dagger) = \mathcal{E}_{\mu\nu}. \end{aligned}$$

Proposition 3 *Any real matrix $\mathcal{E}_{\mu\nu}$ associated with linear (trace-preserving) quantum four-valued logic gates (18) has*

$$\mathcal{E}_{0\nu} = \delta_{0\nu}.$$

Proof.

$$\begin{aligned} \mathcal{E}_{0\nu} &= \frac{1}{2^n} \text{Tr}(\sigma_0 \mathcal{E}(\sigma_\nu)) = \frac{1}{2^n} \text{Tr}(\mathcal{E}(\sigma_\nu)) = \\ &= \frac{1}{2^n} \text{Tr}\left(\sum_{j=1}^m A_j \sigma_\nu A_j^\dagger\right) = \frac{1}{2^n} \text{Tr}\left(\left(\sum_{j=1}^m A_j^\dagger A_j\right) \sigma_\nu\right) = \\ &= \frac{1}{2^n} \text{Tr} \sigma_\nu = \delta_{0\nu}. \end{aligned}$$

The general linear n-ququats quantum gate has the form:

$$\mathcal{E} = \begin{pmatrix} 1 & 0 & 0 & \dots & 0 \\ T_1 & R_{11} & R_{12} & \dots & R_{1 \ N-1} \\ T_2 & R_{21} & R_{22} & \dots & R_{2 \ N-1} \\ \dots & \dots & \dots & \dots & \dots \\ T_{N-1} & R_{N-1 \ 1} & R_{N-1 \ 2} & \dots & R_{N-1 \ N-1} \end{pmatrix}.$$

Completely positive condition leads to some inequalities [87, 88, 89] for matrix elements $\mathcal{E}_{\mu\nu}$.

In general case, linear quantum 4-value logic gate acts on $|0\rangle$ by

$$\hat{\mathcal{E}}|0\rangle = |0\rangle + \sum_{k=1}^{N-1} T_k |k\rangle.$$

For example, single ququat quantum gate acts by

$$\hat{\mathcal{E}}|0\rangle = |0\rangle + T_1|1\rangle + T_2|2\rangle + T_3|3\rangle.$$

If all T_k , $k = 1, \dots, N - 1$ is equal to zero, then $\hat{\mathcal{E}}|0\rangle = |0\rangle$. The linear quantum gates with $T = 0$ conserve the maximally mixed state $|0\rangle$ invariant.

Definition *A quantum four-valued logic gate $\hat{\mathcal{E}}$ is called unital gate or gate with $T = 0$ if maximally mixed state $|0\rangle$ is invariant under the action of this gate: $\hat{\mathcal{E}}|0\rangle = |0\rangle$.*

The output state of a linear quantum four-valued logic gate $\hat{\mathcal{E}}$ is $|00\dots 0\rangle$ if and only if the input state is $|00\dots 0\rangle$. If $\hat{\mathcal{E}}|00\dots 0\rangle \neq |00\dots 0\rangle$, then $\hat{\mathcal{E}}$ is not unital gate.

Proposition 4 The matrix $\mathcal{E}_{\mu\nu}$ of linear trace-preserving n-ququats gate $\hat{\mathcal{E}}$ is an element of group $TGL(4^n - 1, \mathbb{R})$ which is a semidirect product of general linear group $GL(4^n - 1, \mathbb{R})$ and translation group $T(4^n - 1, \mathbb{R})$.

Proof. This proposition follows from proposition 3. Any element (gate matrix $\mathcal{E}_{\mu\nu}$) of group $TGL(4^n - 1, \mathbb{R})$ can be represented by

$$\mathcal{E}(T, R) = \begin{pmatrix} 1 & 0 \\ T & R \end{pmatrix},$$

where T is a column with $4^n - 1$ elements, 0 is a line with $4^n - 1$ zero elements, and R is a real $(4^n - 1) \times (4^n - 1)$ matrix $R \in GL(4^n - 1, \mathbb{R})$. If R is orthogonal $(4^n - 1) \times (4^n - 1)$ matrix ($R^T R = I$), then we have motion group [94, 95, 96]. The group multiplication of elements $\mathcal{E}(T, R)$ and $\mathcal{E}(T', R')$ is defined by

$$\mathcal{E}(T, R)\mathcal{E}(T', R') = \mathcal{E}(T + RT', RR').$$

In particular, we have

$$\mathcal{E}(T, R) = \mathcal{E}(T, I)\mathcal{E}(0, R), \quad \mathcal{E}(T, R) = \mathcal{E}(0, R)\mathcal{E}(R^{-1}T, I).$$

where I is unit $(4^n - 1) \times (4^n - 1)$ matrix.

Therefore any linear quantum gate can be decompose on unital gate and translation gate. It allows to consider two types of linear trace-preserving gates:

- 1) Translation gates $\hat{\mathcal{E}}^{(T)}$ defined by matrices $\mathcal{E}(T, I)$.
- 2) Unital quantum gates $\hat{\mathcal{E}}^{(T=0)}$ with the matrices $\mathcal{E}(0, R)$.

Translation gate $\hat{\mathcal{E}}^{(T)}$ is

$$\hat{\mathcal{E}}^{(T)} = \sum_{\mu=0}^{N-1} |\mu\rangle\langle\mu| + \sum_{k=1}^{N-1} T_k |k\rangle\langle 0|,$$

has the matrix

$$\mathcal{E}(T, I) = \begin{pmatrix} 1 & 0 & 0 & \dots & 0 \\ T_1 & 1 & 0 & \dots & 0 \\ T_2 & 0 & 1 & \dots & 0 \\ \dots & \dots & \dots & \dots & \dots \\ T_{N-1} & 0 & 0 & \dots & 1 \end{pmatrix}.$$

One-parameter subgroups $T(4^n - 1, \mathbb{R})$ of n-ququats translation gates consist of one-parameters $4^n - 1$ gates

$$\hat{\mathcal{E}}^{(T,k)}(t) = \sum_{\mu=0}^{N-1} |\mu\rangle\langle\mu| + t|k\rangle\langle 0|,$$

where t is a real parameter and $k = 1, 2, \dots, 4^n - 1$. Generators of the gates are defined by

$$\hat{H}_k = \left(\frac{d}{dt} \hat{\mathcal{E}}^{(T,k)}(t) \right)_{t=0} = |k\rangle\langle 0|.$$

The quantum n-ququats unital gate can be represented by

$$\hat{\mathcal{E}}^{(T=0)} = |0\rangle\langle 0| + \sum_{k=1}^{N-1} \sum_{l=1}^{N-1} R_{kl} |k\rangle\langle l|,$$

where $N = 4^n$. The gate matrix $\mathcal{E}(0, R)$ has the form

$$\mathcal{E}(0, R) = \begin{pmatrix} 1 & 0 & 0 & \dots & 0 \\ 0 & R_{11} & R_{12} & \dots & R_{1 \ N-1} \\ 0 & R_{21} & R_{22} & \dots & R_{2 \ N-1} \\ \dots & \dots & \dots & \dots & \dots \\ 0 & R_{N-1 \ 1} & R_{N-1 \ 2} & \dots & R_{N-1 \ N-1} \end{pmatrix}.$$

In matrix representation the linear trace-preserving gates with $T = 0$ can be described by group $GL(4^n - 1, \mathbb{R})$ which define a set of all linear transformations of $\overline{\mathcal{H}}^{(n)}$ by (16) or (17). The group $GL(4^n - 1, \mathbb{R})$ has $(4^n - 1)^2$ independent one-parameter subgroups $GL_{kl}(4^n - 1, \mathbb{R})$ of one-parameter gates $\hat{\mathcal{E}}^{(kl)}(t)$ such that

$$\hat{\mathcal{E}}^{(kl)}(t) = |0\rangle\langle 0| + t|k\rangle\langle l|.$$

Generators are defined by

$$\hat{H}_{kl} = \left(\frac{d}{dt} \hat{\mathcal{E}}^{(kl)}(t) \right)_{t=0} = |k\rangle\langle l|.$$

where $k, l = 1, 2, \dots, 4^n - 1$. The generators \hat{H}_{kl} of the one-parameter subgroup $GL_{kl}(4^n - 1, \mathbb{R})$ are represented by $4^n \times 4^n$ matrix H_{kl} with elements

$$(H_{kl})_{\mu\nu} = \delta_{\mu k} \delta_{\nu l}.$$

The set of superoperators $\{\hat{H}_{kl}\}$ is a basis of Lie algebra $gl(4^n - 1, \mathbb{R})$ such that

$$[\hat{H}_{ij}, \hat{H}_{kl}] = \delta_{jk} \hat{H}_{il} - \delta_{il} \hat{H}_{jk}.$$

VI.3 Decomposition for linear quantum gates

Let us consider the n-ququats linear gate

$$\hat{\mathcal{E}} = |0\rangle\langle 0| + \sum_{\mu=1}^{N-1} T_{\mu} |\mu\rangle\langle 0| + \sum_{\mu=1}^{N-1} \sum_{\nu=1}^{N-1} R_{\mu\nu} |\mu\rangle\langle \nu|, \quad (19)$$

where $N = 4^n$. The gate matrix $\mathcal{E}(T, R)$ is an element of Lie group $TGL(4^n - 1, \mathbb{R})$. The matrix R is an element of Lie group $GL(4^n - 1, \mathbb{R})$.

Theorem 1. (Singular Valued Decomposition for Matrix) Any real matrix R can be written in the form $R = \mathcal{U}_1 D \mathcal{U}_2^T$, where \mathcal{U}_1 and \mathcal{U}_2 are real orthogonal $(N - 1) \times (N - 1)$ matrices and $D = \text{diag}(\lambda_1, \dots, \lambda_{N-1})$ is diagonal $(N - 1) \times (N - 1)$ matrix such that $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_{N-1} \geq 0$.

Proof. This theorem is proved in [90, 91, 92, 85].

Let us consider the unital gates $\hat{\mathcal{E}}^{(T=0)}$ defined by (19), where all $T_{\mu} = 0$.

Theorem 2. (Singular Valued Decomposition for Gates) Any unital linear gate $\hat{\mathcal{E}}$ defined by (19) with all $T_{\mu} = 0$ can be represented by

$$\hat{\mathcal{E}} = \hat{\mathcal{U}}_1 \hat{D} \hat{\mathcal{U}}_2,$$

where

$\hat{\mathcal{U}}_1$ and $\hat{\mathcal{U}}_2$ are unital orthogonal quantum gates

$$\hat{\mathcal{U}}_i = |0\rangle\langle 0| + \sum_{\mu=1}^{N-1} \sum_{\nu=1}^{N-1} \mathcal{U}_{\mu\nu}^{(i)} |\mu\rangle\langle \nu|, \quad (20)$$

\hat{D} is a unital diagonal quantum gate, such that

$$\hat{D} = |0\rangle\langle 0| + \sum_{\mu=1}^{N-1} \lambda_{\mu} |\mu\rangle\langle \mu|, \quad (21)$$

where $\lambda_{\mu} \geq 0$.

Proof. The proof of this theorem can be easily realized in matrix representation by using theorem 1.

In general case, we have the following theorem.

Theorem 3. (Singular Valued Decomposition for Gates)

Any linear quantum four-valued logic gate (19) can be represented by

$$\hat{\mathcal{E}} = \hat{\mathcal{E}}^{(T)} \hat{\mathcal{U}}_1 \hat{D} \hat{\mathcal{U}}_2,$$

where

$\hat{\mathcal{U}}_1$ and $\hat{\mathcal{U}}_2$ are unital orthogonal quantum gates (20).

\hat{D} is a unital diagonal quantum gate (21).

$\hat{\mathcal{E}}^{(T)}$ is a translation quantum gate, such that

$$\hat{\mathcal{E}}^{(T)} = |0\rangle\langle 0| + \sum_{\mu=1}^{N-1} |\mu\rangle\langle \mu| + \sum_{\mu=1}^{N-1} T_{\mu} |\mu\rangle\langle 0|.$$

Proof. The proof of this theorem can be easily realized in matrix representation by using Proposition 4 and Theorem 1.

As a result we have that any trace-preserving gate can be realized by 3 types of gates: (1) unital orthogonal quantum gates $\hat{\mathcal{U}}$ with matrix $U \in SO(4^n - 1, \mathbb{R})$; (2) unital diagonal quantum gate \hat{D} with matrix $D \in D(4^n - 1, \mathbb{R})$; (3) nonunital translation gate $\hat{\mathcal{E}}^{(T)}$ with matrix $\mathcal{E}^{(T)} \in T(4^n - 1, \mathbb{R})$.

Proposition 5 If the quantum operation \mathcal{E} has the form

$$\mathcal{E}(\rho) = \sum_{j=1}^m A_j \rho A_j^{\dagger},$$

where A is a self-adjoint operator ($A_j^{\dagger} = A_j$), then quantum four-valued logic gate $\hat{\mathcal{E}}$ is described by symmetric matrix $\mathcal{E}_{\mu\nu} = \mathcal{E}_{\nu\mu}$.

Proof. If $A_j^{\dagger} = A_j$, then

$$\begin{aligned} \mathcal{E}_{\mu\nu} &= \frac{1}{\sqrt{2^n}} \sum_{j=1}^m \text{Tr}(\sigma_{\mu} A_j \sigma_{\nu} A_j) = \\ &= \frac{1}{\sqrt{2^n}} \sum_{j=1}^m \text{Tr}(\sigma_{\nu} A_j \sigma_{\mu} A_j) = \mathcal{E}_{\nu\mu}. \end{aligned}$$

This gate is trace-preserving if $\mathcal{E}_{\mu 0} = \mathcal{E}_{0\mu} = \delta_{\mu 0}$.

The symmetric n-ququat linear (trace-preserving) quantum gate has the form

$$\hat{\mathcal{E}}^{(S)} = |0\rangle\langle 0| + \sum_{\mu=1}^{N-1} \sum_{\nu=1}^{N-1} S_{\mu\nu} |\mu\rangle\langle \nu|. \quad (22)$$

where $S_{\mu\nu} = S_{\nu\mu}$ and this gate is unital ($T_k = 0$ for all k).

Theorem 4. (Polar Decomposition for matrix)

Any real $(N-1) \times (N-1)$ matrix R can be written in the form $R = \mathcal{U}S$ or $R = S'\mathcal{U}'$, where \mathcal{U} and \mathcal{U}' are orthogonal $(N-1) \times (N-1)$ matrices and S and S' are symmetric $(N-1) \times (N-1)$ matrices such that $S = \sqrt{R^T R}$, $S' = \sqrt{R R^T}$.

Proof. This theorem is proved in [85].

Theorem 5. (Polar Decomposition for gates)

Any linear four-valued logic gate (19) can be written in the form $\hat{\mathcal{E}} = \hat{\mathcal{U}}\hat{\mathcal{E}}^{(S)}$ or $\hat{\mathcal{E}} = \hat{\mathcal{E}}^{(S')}\hat{\mathcal{U}}'$, where

$\hat{\mathcal{U}}$ and $\hat{\mathcal{U}}'$ are orthogonal gates (20).

$\hat{\mathcal{E}}^{(S')}$ and $\hat{\mathcal{E}}^{(S)}$ are symmetric gates (22).

Proof. The proof of this theorem can be easily realized in matrix representation by using Theorem 4.

VI.4 Unitary two-valued logic gates as orthogonal four-valued logic gates

Let us rewrite the representation (2) for the mixed state $|\rho(t)\rangle$ using generalized computational basis in the form

$$|\rho(t)\rangle = \sum_{\mu=0}^{N-1} |\mu\rangle \rho_{\mu}(t),$$

where

$$\rho_{\mu}(t) = (\mu|\rho(t)) = \frac{1}{\sqrt{2^n}} \text{Tr}(\sigma_{\mu} \rho(t)).$$

Note that $\rho_0(t) = (0|\rho(t)) = 1/\sqrt{2^n} \text{Tr} \rho(t) = 1/\sqrt{2^n}$ for all cases.

Proposition 6 In the generalized computational basis any unitary two-valued logic gate U can be considered as a quantum four-valued logic gate:

$$\hat{\mathcal{U}} = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} \mathcal{U}_{\mu\nu} |\mu\rangle\langle \nu|, \quad (23)$$

where $\mathcal{U}_{\mu\nu}$ is a real matrix such that

$$\mathcal{U}_{\mu\nu} = \frac{1}{2^n} \text{Tr}(\sigma_{\nu} U \sigma_{\mu} U^{\dagger}). \quad (24)$$

Proof. Let us consider unitary two-valued logic gate U . Using equation (10), we get

$$|\rho(t)\rangle = \hat{\mathcal{U}}_t |\rho(t_0)\rangle.$$

Then

$$(\mu|\rho(t)) = (\mu|\hat{\mathcal{U}}_t |\rho(t_0)) = \sum_{\nu=0}^{N-1} (\mu|\hat{\mathcal{U}}_t |\nu)(\nu|\rho(t_0)).$$

Finally, we obtain

$$\rho_{\mu}(t) = \sum_{\nu=0}^{N-1} \mathcal{U}_{\mu\nu}(t, t_0) \rho_{\nu}(t_0),$$

where

$$\mathcal{U}_{\mu\nu}(t, t_0) = (\mu|\hat{\mathcal{U}}_t |\nu) = \frac{1}{2^n} (\sigma_{\mu} | \mathcal{U}_t(\sigma_{\nu})) =$$

$$= \frac{1}{2^n} \text{Tr} \left(\sigma_\mu U(t, t_0) \sigma_\nu U^\dagger(t, t_0) \right).$$

This formula defines a relation between unitary quantum two-valued logic gates U and the real $4^n \times 4^n$ matrix \mathcal{U} .

Proposition 7 Any four-valued logic gate associated with unitary 2-valued logic gate by (23,24) is unital gate, i.e. gate matrix \mathcal{U} defined by (24) has $\mathcal{U}_{\mu 0} = \mathcal{U}_{0\mu} = \delta_{\mu 0}$.

Proof.

$$\mathcal{U}_{\mu 0} = \frac{1}{2^n} \text{Tr} \left(\sigma_\mu U \sigma_0 U^\dagger \right) = \frac{1}{2^n} \text{Tr} \left(\sigma_\mu U U^\dagger \right) = \frac{1}{2^n} \text{Tr} \sigma_\mu.$$

Using $\text{Tr} \sigma_\mu = \delta_{\mu 0}$ we get $\mathcal{U}_{\mu 0} = \delta_{\mu 0}$.

Let us denote the gate \hat{U} associated with unitary two-valued logic gate U by $\hat{\mathcal{E}}^{(U)}$.

Proposition 8 If U is unitary two-valued logic gate, then in the generalized computational basis a quantum four-valued logic gate $\hat{U} = \hat{\mathcal{E}}^{(U)}$ associated with U is represented by orthogonal matrix $\mathcal{E}^{(U)}$:

$$\mathcal{E}^{(U)} (\mathcal{E}^{(U)})^T = (\mathcal{E}^{(U)})^T \mathcal{E}^{(U)} = I. \quad (25)$$

Proof. Let $\hat{\mathcal{E}}^{(U)}$ is defined by

$$\hat{\mathcal{E}}^{(U)} |\rho\rangle = |U\rho U^\dagger\rangle, \quad \hat{\mathcal{E}}^{(U^\dagger)} |\rho\rangle = |U^\dagger\rho U\rangle.$$

If $U U^\dagger = U^\dagger U = I$, then

$$\hat{\mathcal{E}}^{(U)} \hat{\mathcal{E}}^{(U^\dagger)} = \hat{\mathcal{E}}^{(U^\dagger)} \hat{\mathcal{E}}^{(U)} = \hat{I}.$$

In the matrix representation we have

$$\sum_{\alpha=0}^{N-1} \mathcal{E}_{\mu\alpha}^{(U)} \mathcal{E}_{\alpha\nu}^{(U^\dagger)} = \sum_{\alpha=0}^{N-1} \mathcal{E}_{\mu\alpha}^{(U^\dagger)} \mathcal{E}_{\alpha\nu}^{(U)} = \delta_{\mu\nu},$$

i.e. $\mathcal{E}^{(U^\dagger)} \mathcal{E}^{(U)} = \mathcal{E}^{(U)} \mathcal{E}^{(U^\dagger)} = I$. Note that

$$\mathcal{E}_{\mu\nu}^{(U^\dagger)} = \frac{1}{2^n} \text{Tr} \left(\sigma_\mu U^\dagger \sigma_\nu U \right) = \frac{1}{2^n} \text{Tr} \left(\sigma_\nu U \sigma_\mu U^\dagger \right) = \mathcal{E}_{\nu\mu}^{(U)},$$

i.e. $\mathcal{E}^{(U^\dagger)} = (\mathcal{E}^{(U)})^T$. Finally, we obtain (25).

In matrix representation orthogonal gates can be described by group $SO(4^n - 1, \mathbb{R})$ which is a set of all linear transformations of $\overline{\mathcal{H}}^{(n)}$ $\rho'_\mu = \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} \rho_\nu$ such that $\sum_{\mu=0}^{N-1} \rho_\mu^2 = \text{const}$ and $\det[\mathcal{E}_{\mu\nu}] = 1$. The group $SO(4^n - 1, \mathbb{R})$ has $(4^n - 1)(2 \cdot 4^{n-1} - 1)$ independent one-parameter subgroups $SO_{kl}(4^n - 1, \mathbb{R})$ of one-parameter orthogonal gates which are

$$\hat{\mathcal{E}}^{(kl)}(\alpha) = \sum_{\mu \neq k, l} |\mu\rangle \langle \mu| + \cos \alpha \left(|k\rangle \langle k| + |l\rangle \langle l| \right) +$$

$$+ \sin \alpha \left(|l\rangle \langle k| - |k\rangle \langle l| \right).$$

This gate defines rotation in the flat (k, l) . Let us note that the generators of the one-parameter subgroup $SO_{kl}(4^n - 1, \mathbb{R})$ are represented by antisymmetric $(4^n - 1) \times (4^n - 1)$ matrix X_{kl} with elements

$$(X_{kl})_{\mu\nu} = \delta_{\mu k} \delta_{\nu l} - \delta_{\mu l} \delta_{\nu k}.$$

Proposition 9 If $\hat{\mathcal{E}}^\dagger$ is adjoint superoperator for linear trace-preserving gate $\hat{\mathcal{E}}$, then matrices of the gates are connected by transposition $\mathcal{E}^\dagger = \mathcal{E}^T$:

$$(\mathcal{E}^\dagger)_{\mu\nu} = \mathcal{E}_{\nu\mu}.$$

Proof. Using

$$\hat{\mathcal{E}} = \sum_{j=1}^m \hat{L}_{A_j} \hat{R}_{A_j^\dagger}, \quad \hat{\mathcal{E}}^\dagger = \sum_{j=1}^m \hat{L}_{A_j^\dagger} \hat{R}_{A_j},$$

we get

$$\mathcal{E}_{\mu\nu} = \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(\sigma_\mu A_j \sigma_\nu A_j^\dagger),$$

$$(\mathcal{E}^\dagger)_{\mu\nu} = \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(\sigma_\mu A_j^\dagger \sigma_\nu A_j) =$$

$$= \frac{1}{2^n} \sum_{j=1}^m \text{Tr}(\sigma_\nu A_j \sigma_\mu A_j^\dagger) = \mathcal{E}_{\nu\mu}.$$

Obviously, if

$$\hat{\mathcal{E}} = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu} |\mu\rangle \langle \nu|,$$

then

$$\hat{\mathcal{E}}^\dagger = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} \mathcal{E}_{\nu\mu} |\mu\rangle \langle \nu|.$$

Proposition 10 If $\hat{\mathcal{E}}^\dagger \hat{\mathcal{E}} = \hat{\mathcal{E}} \hat{\mathcal{E}}^\dagger = \hat{I}$, then $\hat{\mathcal{E}}$ is orthogonal gate, i.e. $\mathcal{E}^T \mathcal{E} = \mathcal{E} \mathcal{E}^T = I$.

Proof. If $\hat{\mathcal{E}}^\dagger \hat{\mathcal{E}} = \hat{I}$, then

$$\sum_{\alpha=0}^{N-1} (\mu | \hat{\mathcal{E}}^\dagger | \alpha) (\alpha | \hat{\mathcal{E}} | \nu) = (\mu | \hat{I} | \nu),$$

i.e.

$$\sum_{\alpha=0}^{N-1} (\mathcal{E}^\dagger)_{\mu\alpha} \mathcal{E}_{\alpha\nu} = \delta_{\mu\nu}.$$

Using proposition 9 we have

$$\sum_{\alpha=0}^{N-1} (\mathcal{E}^T)_{\mu\alpha} \mathcal{E}_{\alpha\nu} = \delta_{\mu\nu},$$

i.e. $\mathcal{E}^T \mathcal{E} = I$.

If $\mathcal{E}_{\mu\nu}$ is real orthogonal matrix, then

$$\sum_{\nu=0}^{N-1} (\mathcal{E}_{\mu\nu})^2 = 1.$$

Therefore all elements of orthogonal gate matrix never exceed 1, i.e. $|\mathcal{E}_{\mu\nu}| \leq 1$.

Note that n-qubit unitary two-valued logic gate U is an element of Lie group $SU(2^n)$. The dimension of this group is equal to $\dim SU(2^n) = (2^n)^2 - 1 = 4^n - 1$. The matrix of n-ququat orthogonal linear gate $\hat{U} = \hat{\mathcal{E}}^{(U)}$ can be considered as an element of Lie group $SO(4^n - 1)$. The dimension of this group is equal to $\dim SO(4^n - 1) = (4^n - 1)(2 \cdot 4^{n-1} - 1)$.

For example, if $n = 1$, then

$$\dim SU(2^1) = 3, \quad \dim SO(4^1 - 1) = 3.$$

If $n = 2$, then

$$\dim SU(2^2) = 15, \quad \dim SO(4^2 - 1) = 105.$$

Therefore not all orthogonal 4-valued logic gates for mixed and pure states are connected with unitary 2-valued logic gates for pure states.

VI.5 Single ququat orthogonal gates

Let us consider single ququat 4-valued logic gate \hat{U} associated with unitary single qubit 2-valued logic gate U .

Proposition 11 *Any single-qubit unitary quantum two-valued logic gate can be realized as the product of single ququat simple rotation gates $\hat{U}^{(1)}(\alpha)$, $\hat{U}^{(2)}(\theta)$ and $\hat{U}^{(1)}(\beta)$ defined by*

$$\begin{aligned} \hat{U}^{(1)}(\alpha) &= |0\rangle\langle 0| + |3\rangle\langle 3| + \cos \alpha \left(|1\rangle\langle 1| + |2\rangle\langle 2| \right) + \\ &\quad + \sin \alpha \left(|2\rangle\langle 1| - |1\rangle\langle 2| \right), \\ \hat{U}^{(2)}(\theta) &= |0\rangle\langle 0| + |2\rangle\langle 2| + \cos \theta \left(|1\rangle\langle 1| + |3\rangle\langle 3| \right) + \\ &\quad + \sin \theta \left(|1\rangle\langle 3| - |3\rangle\langle 1| \right), \end{aligned}$$

where α , θ and β are Euler angles.

Proof. Let us consider a general single qubit unitary gate [80]. Every unitary one-qubit gate U can be represented by 2×2 -matrix

$$\begin{aligned} U(\alpha, \theta, \beta) &= e^{-i\alpha\sigma_3/2} e^{-i\theta\sigma_2/2} e^{-i\beta\sigma_3/2} = \\ &= \begin{pmatrix} e^{-i(\alpha/2+\beta/2)} \cos \theta/2 & -e^{-i(\alpha/2-\beta/2)} \sin \theta/2 \\ e^{i(\alpha/2-\beta/2)} \sin \theta/2 & e^{i(\alpha/2+\beta/2)} \cos \theta/2 \end{pmatrix}, \end{aligned}$$

i.e.

$$U(\alpha, \theta, \beta) = U_1(\alpha)U_2(\theta)U_1(\beta),$$

where

$$\begin{aligned} U_1(\alpha) &= \begin{pmatrix} e^{-i\alpha/2} & 0 \\ 0 & e^{i\alpha/2} \end{pmatrix}, \\ U_2(\theta) &= \begin{pmatrix} \cos \theta/2 & -\sin \theta/2 \\ \sin \theta/2 & \cos \theta/2 \end{pmatrix}, \\ U_1(\beta) &= \begin{pmatrix} e^{-i\beta/2} & 0 \\ 0 & e^{i\beta/2} \end{pmatrix}, \end{aligned}$$

where α , θ and β are Euler angles. The correspondent 4×4 -matrix $\mathcal{U}(\alpha, \theta, \beta)$ of four-valued logic gate has the form

$$\mathcal{U}(\alpha, \theta, \beta) = \mathcal{U}^{(1)}(\alpha)\mathcal{U}^{(2)}(\theta)\mathcal{U}^{(1)}(\beta),$$

where

$$\mathcal{U}_{\mu\nu}^{(1)}(\alpha) = \frac{1}{2} \text{Tr} \left(\sigma_\mu U_1(\alpha) \sigma_\nu U_1^\dagger(\alpha) \right),$$

$$\mathcal{U}_{\mu\nu}^{(2)}(\theta) = \frac{1}{2} \text{Tr} \left(\sigma_\mu U_2(\theta) \sigma_\nu U_2^\dagger(\theta) \right),$$

Finally, we obtain

$$\begin{aligned} \mathcal{U}^{(1)}(\alpha) &= \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \alpha & -\sin \alpha & 0 \\ 0 & \sin \alpha & \cos \alpha & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}, \\ \mathcal{U}^{(2)}(\theta) &= \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \theta & 0 & \sin \theta \\ 0 & 0 & 1 & 0 \\ 0 & -\sin \theta & 0 & \cos \theta \end{pmatrix}, \end{aligned}$$

where

$$0 \leq \alpha < 2\pi, \quad 0 \leq \theta \leq \pi, \quad 0 \leq \beta \leq 2\pi.$$

Using $U(\alpha, \theta + 2\pi, \beta) = -U(\alpha, \theta, \beta)$, we get that 2-valued logic gates $U(\alpha, \theta, \beta)$ and $U(\alpha, \theta + 2\pi, \beta)$ map into single 4-valued logic gate $\mathcal{U}(\alpha, \theta, \beta)$. The back rotation 4-valued logic gate is defined by the matrix

$$\mathcal{U}^{-1}(\alpha, \theta, \beta) = \mathcal{U}(2\pi - \alpha, \pi - \theta, 2\pi - \beta).$$

The simple rotation gates $\hat{U}^{(1)}(\alpha)$, $\hat{U}^{(2)}(\theta)$, $\hat{U}^{(1)}(\beta)$ are defined by matrices $\hat{U}^{(1)}(\alpha)$, $\hat{U}^{(2)}(\theta)$ and $\hat{U}^{(1)}(\beta)$.

Let us introduce simple reflection gates by

$$\hat{\mathcal{R}}^{(1)} = |0\rangle\langle 0| - |1\rangle\langle 1| + |2\rangle\langle 2| + |3\rangle\langle 3|,$$

$$\hat{\mathcal{R}}^{(2)} = |0\rangle\langle 0| + |1\rangle\langle 1| - |2\rangle\langle 2| + |3\rangle\langle 3|,$$

$$\hat{\mathcal{R}}^{(3)} = |0\rangle\langle 0| + |1\rangle\langle 1| + |2\rangle\langle 2| - |3\rangle\langle 3|.$$

Proposition 12 *Any single ququat linear gate $\hat{\mathcal{E}}$ defined by orthogonal matrix $\mathcal{E} : \mathcal{E}\mathcal{E}^T = I$ can be realized by*

- simple rotation gates $\hat{U}^{(1)}$ and $\hat{U}^{(2)}$.
- inversion gate $\hat{\mathcal{I}}$ defined by

$$\hat{\mathcal{I}} = |0\rangle\langle 0| - |1\rangle\langle 1| - |2\rangle\langle 2| - |3\rangle\langle 3|.$$

Proof. Using Proposition 11 and

$$\hat{\mathcal{R}}^{(3)} = \hat{U}^{(1)}\hat{\mathcal{I}}, \quad \hat{\mathcal{R}}^{(2)} = \hat{U}^{(2)}\hat{\mathcal{I}}, \quad \hat{\mathcal{R}}^{(1)} = \hat{U}^{(1)}\hat{U}^{(1)}\hat{\mathcal{I}},$$

we get this proposition.

Example 1. In the generalized computational basis the Pauli matrices as two-valued logic gates are the four-valued logic gates with diagonal 4×4 matrix. The gate $I = \sigma_0$ is

$$\hat{U}^{(\sigma_0)} = \sum_{\mu=0}^3 |\mu\rangle\langle\mu| = \hat{I},$$

i.e. $\mathcal{U}_{\mu\nu}^{(\sigma_0)} = (1/2)\text{Tr}(\sigma_\mu\sigma_\nu) = \delta_{\mu\nu}$.

For the unitary two-valued logic gates are equal to the Pauli matrix σ_k , where $k \in \{1, 2, 3\}$, we have quantum four-valued logic gates

$$\hat{U}^{(\sigma_k)} = \sum_{\mu,\nu=0}^3 \mathcal{U}_{\mu\nu}^{(\sigma_k)} |\mu\rangle\langle\nu|,$$

with the matrix

$$\mathcal{U}_{\mu\nu}^{(\sigma_k)} = 2\delta_{\mu 0}\delta_{\nu 0} + 2\delta_{\mu k}\delta_{\nu k} - \delta_{\mu\nu}. \quad (26)$$

Example 2. In the generalized computational basis the unitary NOT gate ("negation") of two-valued logic

$$X = |0\rangle\langle 1| + |1\rangle\langle 0| = \sigma_1 = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix},$$

is represented by quantum four-valued logic gate

$$\hat{U}^{(X)} = |0\rangle\langle 0| + |1\rangle\langle 1| - |2\rangle\langle 2| - |3\rangle\langle 3|,$$

i.e. 4×4 matrix is

$$\mathcal{U}^{(X)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & -1 \end{pmatrix}.$$

Example 3. The Hadamar two-valued logic gate

$$H = \frac{1}{\sqrt{2}}(\sigma_1 + \sigma_3)$$

can be represented as a four-valued logic gate by

$$\hat{\mathcal{E}}^{(H)} = |0\rangle\langle 0| - |2\rangle\langle 2| + |3\rangle\langle 1| + |1\rangle\langle 3|,$$

with

$$\mathcal{E}_{\mu\nu}^{(H)} = \delta_{\mu 0}\delta_{\nu 0} - \delta_{\mu 2}\delta_{\nu 2} + \delta_{\mu 3}\delta_{\nu 1} + \delta_{\mu 1}\delta_{\nu 3}.$$

VI.6 Measurements as quantum 4-valued logic gates

It is known that superoperator $\hat{\mathcal{E}}$ of von Neumann measurement is defined by

$$\hat{\mathcal{E}}|\rho\rangle = \sum_{k=1}^r |P_k\rangle\langle P_k|, \quad (27)$$

where $\{P_k|k = 1, \dots, r\}$ is a (not necessarily complete) sequence of orthogonal projection operators on $\mathcal{H}^{(n)}$.

Let P_k are projectors onto the pure state $|k\rangle$ which define usual computational basis $\{|k\rangle\}$, i.e. $P_k = |k\rangle\langle k|$.

Proposition 13 A nonlinear four-valued logic gate $\hat{\mathcal{N}}$ for von Neumann measurement (27) of the state $\rho = \sum_{\alpha=0}^{N-1} |\alpha\rangle\rangle\langle\alpha|$ is defined by

$$\hat{\mathcal{N}} = \sum_{k=1}^r \frac{1}{p(k)} \mathcal{E}_{\mu\nu}^{(k)} |\mu\rangle\langle\nu|,$$

where

$$\mathcal{E}_{\mu\nu}^{(k)} = \frac{1}{2^n} \text{Tr}(\sigma_\mu P_k \sigma_\nu P_k), \quad p(k) = \sqrt{2^n} \sum_{\alpha=0}^{N-1} \mathcal{E}_{0\alpha}^{(k)} \rho_\alpha. \quad (28)$$

Proof. The trace-decreasing superoperator $\hat{\mathcal{E}}_k$ is defined by

$$|\rho\rangle \rightarrow |\rho'\rangle = \mathcal{E}_k|\rho\rangle = |P_k\rangle\rangle\langle P_k|.$$

The superoperator $\hat{\mathcal{E}}$ has the form $\hat{\mathcal{E}}_k = \hat{L}_{P_k} \hat{R}_{P_k}$. Then

$$\rho'_{\mu} = (\mu|\rho') = (\mu|\hat{\mathcal{E}}_k|\rho) = \sum_{\nu=0}^{N-1} (\mu|\hat{\mathcal{E}}_k|\nu)\langle\nu|\rho\rangle = \sum_{\nu=0}^{N-1} \mathcal{E}_{\mu\nu}^{(k)} \rho_\nu,$$

where

$$\mathcal{E}_{\mu\nu}^{(k)} = (\mu|\hat{\mathcal{E}}_k|\nu) = \frac{1}{2^n} \text{Tr}(\sigma_\mu P_k \sigma_\nu P_k).$$

The probability that process represented by $\hat{\mathcal{E}}_k$ occurs is

$$p(k) = \text{Tr}(\hat{\mathcal{E}}_k(\rho)) = (I|\hat{\mathcal{E}}|\rho) = \sqrt{2^n} \rho'_0 = \sqrt{2^n} \sum_{\alpha=0}^{N-1} \mathcal{E}_{0\alpha}^{(k)} \rho_\alpha.$$

If

$$\sum_{\alpha=0}^{N-1} \mathcal{E}_{0\alpha} \rho_\alpha \neq 0,$$

then the matrix for nonlinear trace-preserving gate $\hat{\mathcal{N}}$ is

$$\mathcal{N}_{\mu\nu} = \sqrt{2^n} \left(\sum_{\alpha=0}^{N-1} \mathcal{E}_{0\alpha} \rho_\alpha \right)^{-1} \mathcal{E}_{\mu\nu}.$$

Example. Let us consider single ququat projection operator

$$P_0 = |0\rangle\langle 0| = \frac{1}{2}(\sigma_0 + \sigma_3).$$

Using formula (28) we derive

$$\begin{aligned} \mathcal{E}_{\mu\nu}^{(0)} &= \frac{1}{8} \text{Tr}(\sigma_\mu(\sigma_0 + \sigma_3)\sigma_\nu(\sigma_0 + \sigma_3)) = \\ &= \frac{1}{2} (\delta_{\mu 0}\delta_{\nu 0} + \delta_{\mu 3}\delta_{\nu 3} + \delta_{\mu 3}\delta_{\nu 0} + \delta_{\mu 0}\delta_{\nu 3}), \end{aligned}$$

i.e.

$$\mathcal{E}^{(0)} = \begin{pmatrix} 1/2 & 0 & 0 & 1/2 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 1/2 & 0 & 0 & 1/2 \end{pmatrix}.$$

The linear trace-decreasing superoperator for von Neumann measurement projector $|0\rangle\langle 0|$ onto pure state $|0\rangle$ is

$$\hat{\mathcal{E}}^{(0)} = \frac{1}{2}(|0\rangle\langle 0| + |3\rangle\langle 3| + |0\rangle\langle 3| + |3\rangle\langle 0|).$$

Example. For the projection operator

$$P_1 = |1\rangle\langle 1| = \frac{1}{2}(\sigma_0 - \sigma_3)$$

Using formula (28) we derive

$$\mathcal{E}_{\mu\nu}^{(1)} = \frac{1}{2}(\delta_{\mu 0}\delta_{\nu 0} + \delta_{\mu 3}\delta_{\nu 3} - \delta_{\mu 3}\delta_{\nu 0} - \delta_{\mu 0}\delta_{\nu 3}).$$

The linear superoperator $\hat{\mathcal{E}}^{(1)}$ for von Neumann measurement projector onto pure state $|1\rangle$ is

$$\hat{\mathcal{E}}^{(1)} = \frac{1}{2}(|0\rangle\langle 0| + |3\rangle\langle 3| - |0\rangle\langle 3| - |3\rangle\langle 0|),$$

i.e.

$$\mathcal{E}^{(1)} = \begin{pmatrix} 1/2 & 0 & 0 & -1/2 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ -1/2 & 0 & 0 & 1/2 \end{pmatrix}.$$

The superoperators $\hat{\mathcal{E}}^{(0)}$ and $\hat{\mathcal{E}}^{(1)}$ are not trace-preserving. The probabilities that processes represented by superoperators $\hat{\mathcal{E}}^{(k)}$ occurs are

$$p(0) = \frac{1}{\sqrt{2}}(\rho_0 + \rho_3), \quad p(1) = \frac{1}{\sqrt{2}}(\rho_0 - \rho_3).$$

VI.7 Reversible quantum 4-valued logic gate

In the paper [97], Mabuchi and Zoller have shown how a measurement on a quantum system can be reversed under appropriate conditions. In the papers [98, 99, 100, 12] was considered necessary and sufficient conditions for general quantum operations to be reversible.

Let us consider quantum operation \mathcal{E} on a subspace \mathcal{M} of the total state space.

Theorem 6. A quantum operation \mathcal{E}

$$\mathcal{E}(\rho) = \sum_{j=1}^m A_j \rho A_j^\dagger$$

is reversible on subspace \mathcal{M} if and only if there exists a positive matrix M such that

$$P_{\mathcal{M}} A_k^\dagger A_j P_{\mathcal{M}} = M_{jk} P_{\mathcal{M}}. \quad (29)$$

where $P_{\mathcal{M}}$ is a projector onto subspace \mathcal{M} . The trace of M

$$\sum_{j=1}^m M_{jj} = \mu^2$$

is the constant value of $\text{Tr}(\mathcal{E}(\rho))$ on \mathcal{M} .

Proof. This result was proved in [12, 98, 99].

Let $\hat{\mathcal{E}}^{(\mathcal{M})}$ is projection superoperator defined by

$$\hat{\mathcal{E}}^{(\mathcal{M})}(\rho) = P_{\mathcal{M}} \rho P_{\mathcal{M}}.$$

Note that

$$\hat{\mathcal{E}}^{(\mathcal{M})} \hat{\mathcal{E}}^{(\mathcal{M})} = \hat{\mathcal{E}}^{(\mathcal{M})}, \quad (\hat{\mathcal{E}}^{(\mathcal{M})})^\dagger = \hat{\mathcal{E}}^{(\mathcal{M})}.$$

Let $\hat{\mathcal{E}}_{\mathcal{M}}$ be the restriction of $\hat{\mathcal{E}}$ to the subspace \mathcal{M}

$$\hat{\mathcal{E}}_{\mathcal{M}}(\rho) = \sum_{j=1}^m A_j P_{\mathcal{M}} \rho P_{\mathcal{M}} A_j^\dagger. \quad (30)$$

Notice that $\hat{\mathcal{E}}_{\mathcal{M}}(\rho) = \hat{\mathcal{E}}(\rho)$ if ρ lies wholly in \mathcal{M} . Note, that the adjoint superoperator for trace-decreasing quantum operation is generally not a quantum operation, since it can be trace-increasing, but it is always a completely positive map.

Equation (29) is equivalent to the requirement that superoperator $\hat{\mathcal{E}}_{\mathcal{M}}^\dagger(\rho)$ be a positive multiple of identity operation on \mathcal{M} . This requirement can be formulated as theorem.

Theorem 7.

A necessary and sufficient condition for reversibility of linear superoperator $\hat{\mathcal{E}}$ on the subspace \mathcal{M} is

$$\hat{\mathcal{E}}^{\mathcal{M}} \hat{\mathcal{E}}^\dagger \hat{\mathcal{E}} \hat{\mathcal{E}}^{\mathcal{M}} = \gamma \hat{\mathcal{E}}^{\mathcal{M}}.$$

Proof. For the proofs we refer to [99].

VII Classical four-valued logic classical gates

Let us consider some elements of classical four-valued logic. For the concept of many-valued logic see [72, 73, 74, 75, 76].

VII.1 Elementary classical gates

A classical four-valued logic gate is called a function $g(x_1, \dots, x_n)$ if following conditions hold:

- all $x_i \in \{0, 1, 2, 3\}$, where $i = 1, \dots, n$.
- $g(x_1, \dots, x_n) \in \{0, 1, 2, 3\}$.

It is known that the number of all classical logic gates with n -arguments x_1, \dots, x_n is equal to 4^{4^n} . The number of classical logic gates $g(x)$ with single argument is equal to $4^{4^1} = 256$.

Single argument classical gates								
x	$\sim x$	$\square x$	$\diamond x$	\bar{x}	I_0	I_1	I_2	I_3
0	3	0	0	1	3	0	0	0
1	2	0	3	2	0	3	0	0
2	1	0	3	3	0	0	3	0
3	0	3	3	0	0	0	0	3

Single argument classical gates								
x	0	1	2	3	g_1	g_2	g_3	
0	0	1	2	3	3	0	1	
1	0	1	2	3	0	1	1	
2	0	1	2	3	1	3	2	
3	0	1	2	3	2	2	3	

The number of classical logic gates $g(x_1, x_2)$ with two-arguments is equal to

$$4^{4^2} = 4^{16} = 42949677296.$$

Let us write some of these gates.

Two-arguments classical gates				
(x_1, x_2)	\wedge	\vee	V_4	$\sim V_4$
(0;0)	0	0	1	2
(0;1)	0	1	2	1
(0;2)	0	2	3	0
(0;3)	0	3	0	3
(1;0)	0	1	2	1
(1;1)	1	1	2	1
(1;2)	1	2	3	0
(1;3)	1	3	0	3
(2;0)	0	2	3	0
(2;1)	1	2	3	0
(2;2)	2	2	3	0
(2;3)	2	3	0	3
(3;0)	0	3	0	3
(3;1)	1	3	0	3
(3;2)	2	3	0	3
(3;3)	3	3	0	3

Let us define some elementary classical 4-valued logic gates by formulas.

- Lukasiewicz negation: $\sim x = 3 - x$.
- Cyclic shift: $\bar{x} = x + 1(\text{mod}4)$.
- Functions $I_i(x)$, where $i = 0, \dots, 3$, such that $I_i(x) = 3$ if $x = i$ and $I_i(x) = 0$ if $x \neq i$.
- Generalized conjunction: $x_1 \wedge x_2 = \min(x_1, x_2)$.
- Generalized disjunction: $x_1 \vee x_2 = \max(x_1, x_2)$.
- Generalized Sheffer function:

$$V_4(x_1, x_2) = \max(x_1, x_2) + 1(\text{mod}4).$$

Commutative law, associative law and distributive law for the generalized conjunction and disjunction are satisfied:

- Commutative law

$$x_1 \wedge x_2 = x_2 \wedge x_1, \quad x_1 \vee x_2 = x_2 \vee x_1$$

- Associative law

$$(x_1 \vee x_2) \vee x_3 = x_1 \vee (x_2 \vee x_3).$$

$$(x_1 \wedge x_2) \wedge x_3 = x_1 \wedge (x_2 \wedge x_3).$$

- Distributive law

$$x_1 \vee (x_2 \wedge x_3) = (x_1 \vee x_2) \wedge (x_1 \vee x_3).$$

$$x_1 \wedge (x_2 \vee x_3) = (x_1 \wedge x_2) \vee (x_1 \wedge x_3).$$

Note that the Lukasiewicz negation is satisfied

$$\sim(\sim x) = x, \quad \sim(x_1 \wedge x_2) = (\sim x_1) \vee (\sim x_2).$$

The shift \bar{x} for x is not satisfied usual negation rules:

$$\bar{\bar{x}} \neq x, \quad \overline{x_1 \wedge x_2} \neq \bar{x}_1 \vee \bar{x}_2.$$

The analog of disjunction normal form of the n-arguments 4-valued logic gate is

$$g(x_1, \dots, x_n) = \bigvee_{(k_1, \dots, k_n)} I_{k_1}(x_1) \wedge \dots \wedge I_{k_n}(x_n) \wedge g(k_1, \dots, k_n).$$

VII.2 Universal classical gates

Let us consider universal sets of universal classical gates of four-valued logic.

Theorem 8.

The set $\{0, 1, 2, 3, I_0, I_1, I_2, I_3, x_1 \wedge x_2, x_1 \vee x_2\}$ is universal.

The set $\{\bar{x}, x_1 \vee x_2\}$ is universal.

The gate $V_4(x_1, x_2)$ is universal.

Proof. This theorem is proved in [75].

Theorem 9.

All logic single argument 4-valued gates $g(x)$ can be generated by functions:

- $g_1(x) = x - 1(\text{mod}4)$.
- $g_2(x)$: $g_2(0) = 0, g_2(1) = 1, g_2(2) = 3, g_2(3) = 2$.
- $g_3(x) = 1$ if $x = 0$ and $g_3(x) = x$ if $x \neq 0$.

Proof. This theorem was proved by Piccard in [78].

VIII Quantum four-valued logic gates for classical gates

VIII.1 Quantum gates for single argument classical gates

Let us consider linear trace-preserving quantum gates for classical gates $\sim, \bar{x}, I_0, I_1, I_2, I_3, 0, 1, 2, 3, g_1, g_2, g_3, \diamond, \square$.

Proposition 14 *Any single argument classical gate $g(\nu)$ can be realized as linear trace-preserving quantum four-valued logic gate by*

$$\hat{\mathcal{E}}^{(g)} = |0\rangle\langle 0| + \sum_{k=1}^3 |g(k)\rangle\langle k| + (1 - \delta_{0g(0)}) \left(|g(0)\rangle\langle 0| - \sum_{\mu=0}^3 \sum_{\nu=0}^3 (1 - \delta_{\mu g(\nu)}) |\mu\rangle\langle \nu| \right).$$

Proof. The proof is by direct calculation in

$$\hat{\mathcal{E}}^{(g)}|\alpha\rangle = |g(\alpha)\rangle,$$

where

$$\hat{\mathcal{E}}^{(g)}|\alpha\rangle = \frac{1}{\sqrt{2}} \left(\hat{\mathcal{E}}^{(g)}|0\rangle + \hat{\mathcal{E}}^{(g)}|\alpha\rangle \right).$$

Examples.

1. Luckasiewicz negation gate is

$$\hat{\mathcal{E}}^{(LN)} = |0\rangle(0) + |1\rangle(2) + |2\rangle(1) + |3\rangle(0) - |3\rangle(3).$$

$$\mathcal{E}^{(LN)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & -1 \end{pmatrix}.$$

2. The four-valued logic gate I_0 can be realized by

$$\hat{\mathcal{E}}^{(I_0)} = |0\rangle(0) + |3\rangle(0) - \sum_{k=1}^3 |3\rangle(k).$$

$$\mathcal{E}^{(I_0)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 1 & -1 & -1 & -1 \end{pmatrix}.$$

3. The gates $I_k(x)$, where $k = 1, 2, 3$ is

$$\hat{\mathcal{E}}^{(I_k)} = |0\rangle(0) + |3\rangle(k).$$

For example,

$$\mathcal{E}^{(I_1)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix},$$

4. The gate \bar{x} can be realized by

$$\hat{\mathcal{E}}^{(\bar{x})} = |0\rangle(0) + |1\rangle(0) + |2\rangle(1) + |3\rangle(2) - \sum_{k=1}^3 |1\rangle(k).$$

$$\mathcal{E}^{(\bar{x})} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 1 & -1 & -1 & -1 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{pmatrix}.$$

5. The constant gates 0 and $k = 1, 2, 3$ can be realized by

$$\hat{\mathcal{E}}^{(0)} = |0\rangle(0), \quad \hat{\mathcal{E}}^{(k)} = |0\rangle(0) + |k\rangle(0).$$

For example,

$$\mathcal{E}^{(1)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}.$$

6. The gate $g_1(x)$ can be realized by

$$\hat{\mathcal{E}}^{(g_1)} = |0\rangle(0) + |1\rangle(2) + |2\rangle(3) + |3\rangle(0) - \sum_{k=1}^3 |3\rangle(k).$$

$$\mathcal{E}^{(g_1)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 1 & -1 & -1 & -1 \end{pmatrix}.$$

7. The gate $g_2(x)$ is

$$\hat{\mathcal{E}}^{(g_2)} = |0\rangle(0) + |1\rangle(1) + |3\rangle(2) + |2\rangle(3).$$

$$\mathcal{E}^{(g_2)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}.$$

8. The gate $g_3(x)$ can be realized by

$$\hat{\mathcal{E}}^{(g_3)} = |0\rangle(0) + |2\rangle(2) + |3\rangle(3) + |1\rangle(0) - |1\rangle(2) - |1\rangle(3).$$

$$\mathcal{E}^{(g_3)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 1 & 0 & -1 & -1 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

9. The gate $\diamond x$ is

$$\hat{\mathcal{E}}^{(\diamond)} = |0\rangle(0) + \sum_{k=1}^3 |3\rangle(k).$$

$$\mathcal{E}^{(\diamond)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 \end{pmatrix}.$$

10. The gate $\square x = \sim \diamond x$ is

$$\hat{\mathcal{E}}^{(\sim \diamond)} = |0\rangle(0) + |3\rangle(3).$$


$$\mathcal{E}^{(\square)} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

Note that quantum gates $\hat{\mathcal{E}}^{(LN)}$, $\hat{\mathcal{E}}^{(I_0)}$, $\hat{\mathcal{E}}^{(k)}$, $\hat{\mathcal{E}}^{(g_1)}$ are not unital gates.

VIII.2 Quantum gates for two-arguments classical gates

Let us consider quantum gates for two-arguments classical gates.

1. The generalized conjunction $x_1 \wedge x_2 = \min(x_1, x_2)$ and generalized disjunction $x_1 \vee x_2 = \max(x_1, x_2)$ can be realized by two-ququat gate with $T = 0$:

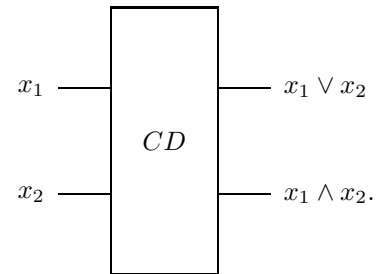


Let us write the quantum gate which realizes the CD gate in the generalized computational basis by

$$\hat{\mathcal{E}} = \sum_{\mu}^{N-1} \sum_{\nu}^{N-1} |\mu\nu\rangle(\mu\nu) + \sum_{k=1}^3 (|0k\rangle - |k0\rangle)(k0) +$$

$$+ \sum_{k=2}^3 (|1k\rangle - |k1\rangle)(k1| + (|23\rangle - |32\rangle)(32|.$$

2. The Sheffer function gate $|x_1, x_2\rangle \rightarrow |V_4(x_1, x_2), \sim V_4(x_1, x_2)\rangle$ can be realized by two-ququat gate with $T \neq 0$:

$$\begin{aligned} \hat{\mathcal{E}}^{(SF)} = & |00\rangle(00| + |12\rangle(00| - \sum_{\mu=0}^3 \sum_{\nu=1}^3 |12\rangle(\mu\nu| + |21\rangle(10| + \\ & + |21\rangle(11| + |30\rangle(02| + |30\rangle(20| + |30\rangle(12| + |30\rangle(21| + \\ & + |30\rangle(22| + |03\rangle(03| + |03\rangle(13| + |03\rangle(23| + \sum_{\mu=0}^3 |03\rangle(3\mu|. \end{aligned}$$

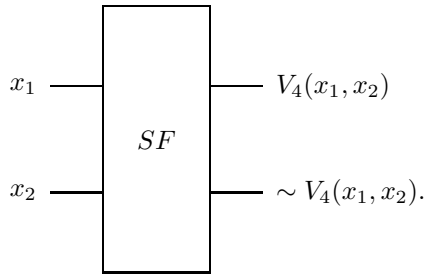

Note that this Sheffer function gate is not unital quantum gate and

$$\hat{\mathcal{E}}^{(SF)} \neq |V_4(x_1, x_2), \sim V_4(x_1, x_2)\rangle(x_1, x_2|.$$

VIII.3 Unital quantum gates for single argument classical gates

It is interesting to consider a representation for classical gates by linear unital quantum gates ($\hat{\mathcal{E}}|0\rangle = |0\rangle$). There is a restriction for representation single argument classical (4-valued logic) gate by linear quantum four-valued logic gates with $T = 0$ (all $T_k = 0$). Any unital n-ququat quantum gate has the form

$$\hat{\mathcal{E}}^{(T=0)} = |0\rangle(0| + \sum_{\mu=1}^{N-1} \sum_{\nu=1}^{N-1} R_{\mu\nu} |\mu\rangle(\nu|,$$

i.e. $T_k = 0$ for all k and the gate matrix is

$$\mathcal{E}^{(T=0)} = \begin{pmatrix} 1 & 0 & 0 & \dots & 0 \\ 0 & R_{11} & R_{12} & \dots & R_{1 \ N-1} \\ 0 & R_{21} & R_{22} & \dots & R_{2 \ N-1} \\ \dots & \dots & \dots & \dots & \dots \\ 0 & R_{N-1 \ 1} & R_{N-1 \ 2} & \dots & R_{N-1 \ N-1} \end{pmatrix}.$$

Proposition 15 *If the single argument classical (4-valued logic) gate $g(x)$ such that $g(0) = k$, where $k \in \{1, 2, 3\}$ and exists $m \in \{1, 2, 3\}$: $g(m) = l$, where $l \neq k$, then there is no a representation of this gate by some unital quantum four-valued logic gates $\hat{\mathcal{E}}$.*

Proof. If $\hat{\mathcal{E}}|0\rangle = |k\rangle$ and $\hat{\mathcal{E}}|m\rangle = |l\rangle$, where $k \in \{1, 2, 3\}$, $l \neq k$, then

$$\begin{aligned} \mathcal{E}_{k0} = & (k|\hat{\mathcal{E}}|0\rangle = (k|\hat{\mathcal{E}}|0\rangle = (k|k\rangle = \\ = & \frac{1}{\sqrt{2^n}} \left((k|0\rangle + (k|k\rangle) \right) = \frac{1}{\sqrt{2^n}} \neq 0, \end{aligned}$$


i.e. $T_k \neq 0$ in the matrix $\mathcal{E}_{\mu\nu}$.

From this proposition we see that single argument classical gate $g(x)$ can be realized by single ququat quantum gate with $T = 0$ if and only if


1. $g(0) = 0$, or
2. $g(\mu) = const$, i.e. $g(0) = g(1) = g(2) = g(3) = k$ and $k \in \{1, 2, 3\}$.

For example, classical gates $\sim x$, I_0 , \bar{x} , g_1 and g_3 can not be realized by single ququat unital quantum gates.

Single argument classical logic gates such that $g(0) \neq 0$ can not be realized by single ququat quantum gates $\hat{\mathcal{E}}$ with $T = 0$. This classical gates can be realized by two-qubits unital quantum gates. Let us consider Lukasiewicz negation $\sim x = 3 - x$. If $x_2 \neq 0$ and $x_1, x_2 \in \{0, 1, 2, 3\}$ then we can define quantum Lukasiewicz negation gate by



This gate realizes Lukasiewicz negation for x_1 : $LN_2|x_1 \otimes x_2\rangle = |(\sim x_1) \otimes x_2\rangle$ iff $x_2 = 0$. If $x_2 = 0$, then the two-ququat gate must be following



Let us write the unital quantum four-valued logic gate which realizes Lukasiewicz negation in generalized computational basis by

$$\begin{aligned} \hat{\mathcal{E}}^{(LN_2)} = & |00\rangle(00| + \sum_{k=1,2,3} \left(|k3\rangle(k0| + |k2\rangle(k1| + \right. \\ & \left. + |k1\rangle(k2| + |k0\rangle(k3|) \right). \end{aligned}$$

By analogy to realization of Lukasiewicz negation we can derive quantum gates with $T = 0$ for classical gates $I_0(x)$, \bar{x} , g_1 and g_3 .


VIII.4 Unital quantum gates for two-arguments classical gates

By analogy with Proposition 15 we can proof the following.


Proposition 16 *The classical n -arguments 4-valued logic gate $g(x_1, \dots, x_n)$ can be realized as n -ququat unital quantum gate if and only if $g(0, \dots, 0) = 0$, or $g(x_1, \dots, x_n) = \text{const}$.*

The two arguments nonconstant classical gate $g(x_1, x_2)$ can be realized by two-ququat linear unital quantum gate $\hat{\mathcal{E}}$ if $g(0, 0) = 0$.

Two arguments nonconstant classical gates such that $g(0, 0) \neq 0$ can not be realized by two-ququat quantum gates $\hat{\mathcal{E}}$ with $T = 0$. These classical gates can be realized by three-ququats unital quantum gates. Let us consider Sheffer function $V_4(x_1, x_2) = \max(x_1, x_2) + 1 \pmod{4}$. If $x_3 \neq 0$ and $x_1, x_2, x_3 \in \{0, 1, 2, 3\}$, then we can define unital quantum Sheffer gate by

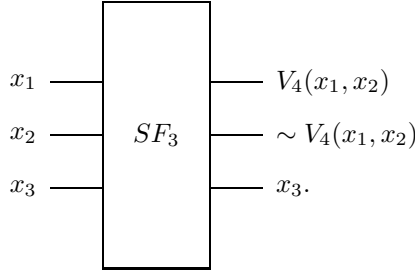

If $x_3 = 0$ then we must have for unital quantum Sheffer gate



Let us write the unital quantum gate which realizes Sheffer function in generalized computational basis by

$$\hat{\mathcal{E}}^{(SF_3)} = \sum_{\mu_1, \mu_2=0}^3 |000\rangle(\mu_1\mu_2 0| + \sum_{\mu_1, \mu_2=0}^3 |V_4(\mu_1, \mu_2), \sim V_4(\mu_1, \mu_2), \mu_3\rangle(\mu_1\mu_2\mu_3|.$$

IX Universal set of quantum four-valued logic gates

The condition for performing arbitrary unitary operations to realize a quantum computation by dynamics of a closed quantum system is well understood [80, 81, 82, 83]. Using a universal gate set, a quantum computer may realize the time sequence of operations corresponding to any unitary dynamics.

Deutsch, Barenco and Ekert [81], DiVincenzo [82] and Lloyd [83] showed that almost any two-qubits quantum gate is universal. It is known [80, 81, 82, 83] that a set of quantum gates that consists of all one-qubit gates and the two-qubits exclusive-or (XOR) gate is universal in the sense that all unitary operations on arbitrary many qubits can be expressed as compositions of these gates. Recently in the paper [59] was considered universality for n -qudits quantum gates.

The same is not true for the general quantum operations (superoperators) corresponding to the dynamics of open quantum systems. In the paper [24] single qubit open quantum system with Markovian dynamics was considered and the resources needed for universality of general quantum operations was studied. An analysis of completely-positive trace-preserving superoperators on single qubit density matrices was realized in papers [86, 87, 88].

Let us study universality for general quantum four-valued logic gates. A set of quantum four-valued logic gates is universal iff all quantum gates on arbitrary many ququats can be expressed as compositions of these gates. A set of quantum four-valued logic gates is universal iff all unitary two-valued logic gates and general quantum operations can be represented by compositions of these gates. Single ququat gates cannot map two initially un-entangled ququats into an entangled state. Therefore the single ququat gates or set of single ququats gates are not universal gates. Quantum gates which are realization of classical gates cannot be universal by definition, since these gates evolve generalized computational states to generalized computational states and never to the superposition of them.

Let us consider linear completely positive trace-decreasing superoperator $\hat{\mathcal{E}}$. This superoperator can be represented in the form

$$\hat{\mathcal{E}} = \sum_{j=1}^m \hat{L}_{A_j} \hat{R}_{A_j}^\dagger, \quad (31)$$

where \hat{L}_A and \hat{R}_A are left and right multiplication superoperators on $\overline{\mathcal{H}}^{(n)}$ defined by $\hat{L}_A|B\rangle = |AB\rangle$, $\hat{R}_A|B\rangle = |BA\rangle$.

The n -ququats linear gate $\hat{\mathcal{E}}$ is completely positive trace-preserving superoperator such that the gate matrix is an element of Lie group $TGL(4^n - 1, \mathbb{R})$. In general case, the n -ququats nonlinear gate $\hat{\mathcal{N}}$ is defined by completely positive trace-decreasing linear superoperator $\hat{\mathcal{E}}$ such that the gate matrix is an element of Lie group $GL(4^n, \mathbb{R})$. The condition of completely positivity leads to difficult inequalities for gate matrix elements [89, 86, 87, 88]. In order to satisfy condition of completely positivity we use the representation (31). To find the universal set of completely positive (linear or nonlinear) gates $\hat{\mathcal{E}}$ we consider the universal set of the superoperators \hat{L}_{A_j} and $\hat{R}_{A_j}^\dagger$. The matrices of these superoperators are connected by complex conjugation. Obviously, the universal set of superoperators \hat{L}_A defines a universal set of completely positive superoperators $\hat{\mathcal{E}}$ of the quantum gates. The trace-preserving condition for linear superoperator (31) is equivalent to the requirement for gate matrix $\mathcal{E} \in TGL(4^n - 1, \mathbb{R})$, i.e. $\mathcal{E}_{0\mu} = \delta_{0\mu}$. The trace-decreasing condition can be satisfied by inequality of the following proposition.

Proposition 17 If the matrix elements $\mathcal{E}_{\mu\nu}$ of a superoperator $\hat{\mathcal{E}}$ is satisfied the inequality

$$\sum_{\mu=0}^{N-1} (\mathcal{E}_{0\mu})^2 \leq 1, \quad (32)$$

then $\hat{\mathcal{E}}$ is a trace-decreasing superoperator.

Proof. Using Schwarz inequality

$$\left(\sum_{\mu=0}^{N-1} \mathcal{E}_{0\mu} \rho_{\mu} \right)^2 \leq \sum_{\mu=0}^{N-1} (\mathcal{E}_{0\mu})^2 \sum_{\nu=0}^{N-1} (\rho_{\nu})^2$$

and the property of density matrix

$$\text{Tr} \rho^2 = (\rho|\rho) = \sum_{\nu=0}^{N-1} (\rho_{\nu})^2 \leq 1,$$

we have

$$|\text{Tr} \hat{\mathcal{E}}(\rho)|^2 = |(0|\hat{\mathcal{E}}|\rho)|^2 = \left(\sum_{\mu=0}^{N-1} \mathcal{E}_{0\mu} \rho_{\mu} \right)^2 \leq \sum_{\mu=0}^{N-1} (\mathcal{E}_{0\mu})^2.$$

Using (32), we get $|\text{Tr} \hat{\mathcal{E}}(\rho)| \leq 1$. Since $\hat{\mathcal{E}}$ is completely positive (or positive) superoperator ($\hat{\mathcal{E}}(\rho) \geq 0$), it follows that

$$0 \leq \text{Tr} \hat{\mathcal{E}}(\rho) \leq 1,$$

i.e. $\hat{\mathcal{E}}$ is trace-decreasing superoperator.

Let the superoperators \hat{L}_A and \hat{R}_{A^\dagger} be called pseudo-gates. These superoperators can be represented by

$$\hat{L}_A = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} L_{\mu\nu}^{(A)} |\mu\rangle\langle\nu|, \quad \hat{R}_{A^\dagger} = \sum_{\mu=0}^{N-1} \sum_{\nu=0}^{N-1} R_{\mu\nu}^{(A^\dagger)} |\mu\rangle\langle\nu|.$$

Proposition 18 The matrix of the completely positive superoperator (31) can be represented by

$$\mathcal{E}_{\mu\nu} = \sum_{j=1}^m \sum_{\alpha=0}^{N-1} L_{\mu\alpha}^{(jA)} R_{\alpha\nu}^{(jA^\dagger)}. \quad (33)$$

Proof. Let us write the matrix $\mathcal{E}_{\mu\nu}$ by matrices of superoperators \hat{L}_{A_j} and $\hat{R}_{A_j^\dagger}$.

$$\mathcal{E}_{\mu\nu} = (\mu|\hat{\mathcal{E}}|\nu) = \sum_{j=1}^m (\mu|\hat{L}_{A_j} \hat{R}_{A_j^\dagger} |\nu) =$$

$$= \sum_{j=1}^m \sum_{\alpha=0}^{N-1} (\mu|\hat{L}_{A_j} |\alpha) (\alpha|\hat{R}_{A_j^\dagger} |\nu) = \sum_{j=1}^m \sum_{\alpha=0}^{N-1} L_{\mu\alpha}^{(jA)} R_{\alpha\nu}^{(jA^\dagger)}.$$

Finally, we obtain (33), where

$$L_{\mu\alpha}^{(jA)} = (\mu|\hat{L}_{A_j} |\alpha) = \frac{1}{2^n} \text{Tr} (\sigma_{\mu} \hat{L}_{A_j} \sigma_{\alpha}) =$$

$$= \frac{1}{2^n} \text{Tr} (\sigma_{\mu} A \sigma_{\alpha}) = \frac{1}{2^n} \text{Tr} (\sigma_{\alpha} \sigma_{\mu} A),$$

$$\begin{aligned} R_{\alpha\nu}^{(jA^\dagger)} &= (\alpha|\hat{R}_{A_j^\dagger} |\nu) = \frac{1}{2^n} \text{Tr} (\sigma_{\alpha} \hat{R}_{A_j^\dagger} \sigma_{\nu}) = \\ &= \frac{1}{2^n} \text{Tr} (\sigma_{\alpha} \sigma_{\nu} A^\dagger) = \frac{1}{2^n} \text{Tr} (A^\dagger \sigma_{\alpha} \sigma_{\nu}). \end{aligned}$$

The matrix elements can be rewritten in the form

$$L_{\mu\alpha}^{(jA)} = \frac{1}{2^n} (\sigma_{\mu} \sigma_{\alpha} | A), \quad R_{\alpha\nu}^{(jA^\dagger)} = \frac{1}{2^n} (A | \sigma_{\alpha} \sigma_{\nu}). \quad (34)$$

Example. Let us consider the single ququat pseudo-gate \hat{L}_A . The elements of pseudo-gate matrix $L^{(A)}$ are defined by

$$L_{\mu\nu}^{(A)} = \frac{1}{2} \text{Tr} (\sigma_{\mu} A \sigma_{\nu}).$$

Let us denote

$$a_{\mu} = \frac{1}{2} \text{Tr} (\sigma_{\mu} A).$$

Using

$$L_{kl}^{(A)} = \frac{1}{2} \text{Tr} (\sigma_l \sigma_k A) = \frac{1}{2} \delta_{kl} \text{Tr} A + \frac{i}{2} \varepsilon_{lkm} \text{Tr} (\sigma_m A),$$

where $k, l, m = 1, 2, 3$, we get

$$\begin{aligned} \hat{L}_A &= \sum_{\mu=0}^3 a_0 |\mu\rangle\langle\mu| + \sum_{k=0}^3 a_k (|0\rangle\langle k| + |k\rangle\langle 0|) + \\ &+ i a_1 (|3\rangle\langle 2| - |2\rangle\langle 3|) + i a_2 (|1\rangle\langle 3| - |3\rangle\langle 1|) + \\ &+ i a_3 (|2\rangle\langle 1| - |1\rangle\langle 2|). \end{aligned}$$

The pseudo-gate matrix is

$$\begin{aligned} L_{\mu\nu}^{(A)} &= \delta_{\mu\nu} \text{Tr} A + \sum_{m=1}^3 (\delta_{\mu 0} \delta_{\nu m} + \delta_{\mu m} \delta_{\nu 0}) \text{Tr} (\sigma_m A) + \\ &+ i \sum_{m=1}^3 \delta_{\mu k} \delta_{\nu l} \varepsilon_{lkm} \text{Tr} (\sigma_m A), \end{aligned}$$

i.e.

$$L^{(A)} = \begin{pmatrix} a_0 & a_1 & a_2 & a_3 \\ a_1 & a_0 & -i a_3 & i a_2 \\ a_2 & i a_3 & a_0 & -i a_1 \\ a_3 & -i a_2 & i a_1 & a_0 \end{pmatrix}.$$

Let us consider properties of the matrix elements $L_{\mu\alpha}^{(jA)}$ and $R_{\mu\alpha}^{(jA^\dagger)}$.

Proposition 19 The matrices $L_{\mu\alpha}^{(jA)}$ and $R_{\mu\alpha}^{(jA^\dagger)}$ are complex $4^n \times 4^n$ matrices and their elements are connected by complex conjugation:

$$(L_{\mu\alpha}^{(jA)})^* = R_{\mu\alpha}^{(jA^\dagger)}.$$

Proof. Using complex conjugation of the matrix elements (34), we get

$$(L_{\mu\alpha}^{(jA)})^* = \frac{1}{2^n}(\sigma_\mu\sigma_\alpha|A)^* = \frac{1}{2^n}(A|\sigma_\mu\sigma_\alpha) = R_{\mu\alpha}^{(jA^\dagger)}.$$

We can write the gate matrix (33) in the form

$$\mathcal{E}_{\mu\nu} = \sum_{j=1}^m \sum_{\alpha=0}^{N-1} L_{\mu\alpha}^{(jA)} (L_{\alpha\nu}^{(jA)})^*.$$

Proposition 20 *The matrices $L_{\mu\alpha}^{(jA)}$ and $R_{\mu\alpha}^{(jA^\dagger)}$ of the n -ququats quantum gate (31) are the elements of Lie group $GL(4^n, \mathbb{C})$.*

Proof. The proof is trivial.

A two-ququats gate $\hat{\mathcal{E}}$ is called primitive [59] if $\hat{\mathcal{E}}$ maps tensor product of single ququats to tensor product of single ququats, i.e. if $|\rho_1\rangle$ and $|\rho_2\rangle$ are ququats, then we can find ququats $|\rho'_1\rangle$ and $|\rho'_2\rangle$ such that

$$\hat{\mathcal{E}}|\rho_1 \otimes \rho_2\rangle = |\rho'_1 \otimes \rho'_2\rangle.$$

The superoperator $\hat{\mathcal{E}}$ is called imprimitive if $\hat{\mathcal{E}}$ is not primitive.

It can be shown that almost every pseudo-gate that operates on two or more ququats is universal pseudo-gate.

Proposition 21 *The set of all single ququat pseudo-gates and any imprimitive two-ququats pseudo-gate are universal set of pseudo-gates.*

Proof. This proposition can be proved by analogy with [82, 81, 59]. Let us consider some points of the proof. Expressed in group theory language, all n -ququats pseudo-gates are elements of the Lie group $GL(4^n, \mathbb{C})$. Two-ququats pseudo-gates \hat{L} are elements of Lie group $GL(16, \mathbb{C})$. The question of universality is the same as the question of what set of superoperators \hat{L} sufficient to generate $GL(16, \mathbb{C})$. The group $GL(16, \mathbb{C})$ has $(16)^2 = 256$ independent one-parameter subgroups $GL_{\mu\nu}(16, \mathbb{C})$ of one-parameter pseudo-gates $\hat{L}^{(\mu\nu)}(t)$ such that $\hat{L}^{(\mu\nu)}(t) = t|\mu\rangle\langle\nu|$. Infinitesimal generators of Lie group $GL(4^n, \mathbb{C})$ are defined by

$$\hat{H}_{\mu\nu} = \left(\frac{d}{dt} \hat{L}^{(\mu\nu)}(t) \right)_{t=0},$$

where $\mu, \nu = 0, 1, \dots, 4^n - 1$. The generators $\hat{H}_{\mu\nu}$ of the one-parameter subgroup $GL_{\mu\nu}(4^n, \mathbb{R})$ are superoperators of the form $\hat{H}_{\mu\nu} = |\mu\rangle\langle\nu|$ on $\overline{\mathcal{H}}^{(n)}$ which can be represented by $4^n \times 4^n$ matrix $H_{\mu\nu}$ with elements

$$(H_{\mu\nu})_{\alpha\beta} = \delta_{\alpha\mu}\delta_{\beta\nu}.$$

The set of superoperators $\hat{H}_{\mu\nu}$ is a basis (Weyl basis [84]) of Lie algebra $gl(16, \mathbb{R})$ such that

$$[\hat{H}_{\mu\nu}, \hat{H}_{\alpha\beta}] = \delta_{\nu\alpha}\hat{H}_{\mu\beta} - \delta_{\mu\beta}\hat{H}_{\nu\alpha},$$

where $\mu, \nu, \alpha, \beta = 0, 1, \dots, 15$. Any element \hat{H} of the algebra $gl(16, \mathbb{C})$ can be represented by

$$\hat{H} = \sum_{\mu=0}^{15} \sum_{\nu=0}^{15} h_{\mu\nu} \hat{H}_{\mu\nu},$$

where $h_{\mu\nu}$ are complex coefficients.

As a basis of Lie algebra $gl(16, \mathbb{C})$ we can use 256 linearly independent self-adjoint superoperators

$$H_{\alpha\alpha} = |\alpha\rangle\langle\alpha|, \quad H_{\alpha\beta}^r = |\alpha\rangle\langle\beta| + |\beta\rangle\langle\alpha|,$$

$$H_{\alpha\beta}^i = -i(|\alpha\rangle\langle\beta| - |\beta\rangle\langle\alpha|).$$

where $0 \leq \alpha \leq \beta \leq 15$. The matrices of these generators is Hermitian 16×16 matrices. The matrix elements of 256 Hermitian 16×16 matrices $H_{\alpha\alpha}$, $H_{\alpha\beta}^r$ and $H_{\alpha\beta}^i$ are defined by

$$(H_{\alpha\alpha})_{\mu\nu} = \delta_{\mu\alpha}\delta_{\nu\alpha}, \quad (H_{\alpha\beta}^r)_{\mu\nu} = \delta_{\mu\alpha}\delta_{\nu\beta} + \delta_{\mu\beta}\delta_{\nu\alpha},$$

$$(H_{\alpha\beta}^i)_{\mu\nu} = -i(\delta_{\mu\alpha}\delta_{\nu\beta} - \delta_{\mu\beta}\delta_{\nu\alpha}).$$

For any Hermitian generators \hat{H} exists one-parameter pseudo-gates $\hat{L}(t)$ which can be represented in the form $\hat{L}(t) = \exp it\hat{H}$ such that $\hat{L}^\dagger(t)\hat{L}(t) = \hat{I}$.

Let us write main operations which allow to derive new pseudo-gates \hat{L} from a set of pseudo-gates.

1) We introduce general SWAP (twist) pseudo-gate $\hat{T}^{(SW)}$. A new pseudo-gate $\hat{L}^{(SW)}$ defined by $\hat{L}^{(SW)} = \hat{T}^{(SW)}\hat{L}\hat{T}^{(SW)}$ is obtained directly from \hat{L} by exchanging two ququats.

2) Any superoperator \hat{L} on $\overline{\mathcal{H}}^{(2)}$ generated by the commutator $i[\hat{H}_{\mu\nu}, \hat{H}_{\alpha\beta}]$ can be obtained from $\hat{L}_{\mu\nu}(t) = \exp it\hat{H}_{\mu\nu}$ and $\hat{L}_{\alpha\beta}(t) = \exp it\hat{H}_{\alpha\beta}$ because

$$\exp t [\hat{H}_{\mu\nu}, \hat{H}_{\alpha\beta}] =$$

$$= \lim_{n \rightarrow \infty} \left(\hat{L}_{\alpha\beta}(-t_n)\hat{L}_{\mu\nu}(t_n)\hat{L}_{\alpha\beta}(t_n)\hat{L}_{\mu\nu}(-t_n) \right)^n,$$

where $t_n = 1/\sqrt{n}$. Thus we can use the commutator $i[\hat{H}_{\mu\nu}, \hat{H}_{\alpha\beta}]$ to generate pseudo-gates.

3) Every transformation $\hat{L}(a, b) = \exp i\hat{H}(a, b)$ of $GL(16, \mathbb{C})$ generated by superoperator $\hat{H}(a, b) = a\hat{H}_{\mu\nu} + b\hat{H}_{\alpha\beta}$, where a and b is complex, can be obtained from $\hat{L}_{\mu\nu}(t) = \exp it\hat{H}_{\mu\nu}$ and $\hat{L}_{\alpha\beta}(t) = \exp it\hat{H}_{\alpha\beta}$ by

$$\exp i\hat{H}(a, b) = \lim_{n \rightarrow \infty} \left(\hat{L}_{\mu\nu}\left(\frac{a}{n}\right)\hat{L}_{\alpha\beta}\left(\frac{b}{n}\right) \right)^n.$$

For other details of the proof, see [82, 81, 59] and [79, 80, 83].

X Quantum four-valued logic gates of order (n,m)

In general case, a quantum gate is defined to be the most general quantum operation [1]:

Definition *Quantum gate \hat{G} of order (n, m) is a positive (completely positive) linear (nonlinear) trace preserving map from density matrix operator $|\rho\rangle$ on n -ququats to density matrix operator $|\rho'\rangle$ on m -ququats.*

In the generalized computational (operator) basis the gate \hat{G} of order (n,m) can be represented by Let us rewrite formula by

$$\hat{G}^{(n,m)} = \frac{1}{\sqrt{2^n 2^m}} \sum_{\mu=0}^M \sum_{\nu=0}^N G_{\mu\nu}^{(n,m)} |\sigma_\mu\rangle \langle \sigma_\nu|. \quad (35)$$

where

$$\mu = \mu_1 4^{m-1} + \dots + \mu_{m-1} 4 + \mu_m,$$

$$\nu = \nu_1 4^{n-1} + \dots + \nu_{n-1} 4 + \nu_n.$$

For the gate matrices we use $N = 4^n - 1$ and $M = 4^m - 1$.

The matrix $G_{\mu,\nu}^{(n,m)}$ of linear gate is a real $4^n \times 4^m$ -matrix with

$$G_{0,\nu}^{(n,m)} = \delta_{0\nu}.$$

In general case, linear gates $\hat{G}^{(n,m)}$ of order (n,m) have $G_{\mu 0}^{(n,m)} \neq 0$, i.e. this gate is not unital. i.e.

$$G^{(n,m)} = \begin{pmatrix} 1 & 0 & 0 & \dots & 0 \\ T_1 & R_{11} & R_{12} & \dots & R_{1N} \\ T_2 & R_{21} & R_{22} & \dots & R_{2N} \\ \dots & \dots & \dots & \dots & \dots \\ T_M & R_{M1} & R_{M2} & \dots & R_{MN} \end{pmatrix}.$$

Theorem 10. (Singular Valued Decomposition for Matrix)
Any real $N \times M$ matrix G can be written in the form

$$G = U_M D_{NM} U_N^T,$$

where

U_M is an orthogonal $M \times M$ matrix.

U_N is an orthogonal $N \times N$ matrix.

D_{NM} is diagonal $N \times M$ matrix such that

$$D_{NM} = \text{diag}(\lambda_1, \dots, \lambda_p), \quad p = \min\{N, M\},$$

where $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_p \geq 0$.

Proof. This theorem is proved in [90, 91, 92, 85].

Let us consider the unital gates with $T = 0$ defined by

$$\hat{G}^{(n,m)} = \frac{1}{\sqrt{2^n 2^m}} \left(|0\rangle \langle 0| + \sum_{\mu=1}^M \sum_{\nu=1}^N G_{\mu,\nu}^{(n,m)} |\sigma_\mu\rangle \langle \sigma_\nu| \right). \quad (36)$$

Theorem 12. (Singular Valued Decomposition for Gates)
Any unital linear gate $\hat{G}^{(n,m)}$ of order (n,m) defined by (36) can be represented by

$$\hat{G}^{(n,m)} = \hat{U}^{(m,m)} \hat{D}^{(n,m)} \hat{U}^{(n,n)},$$

where

$\hat{U}^{(m,m)}$ is an orthogonal quantum gate of order (m,m) .

$\hat{U}^{(n,n)}$ is an orthogonal quantum gate of order (n,n) .

$\hat{D}^{(n,m)}$ is a diagonal quantum gate of order (n,m) , such that

$$\hat{D}^{(n,m)} = \frac{1}{\sqrt{2^n 2^m}} \left(|0\rangle \langle 0| + \sum_{\mu=1}^p \lambda_\mu |\sigma_\mu\rangle \langle \sigma_\mu| \right), \quad (37)$$

where $p = \min\{N, M\}$ and $\lambda_\mu \geq 0$.

Proof. The proof of this theorem can be easily realized in matrix representation by using theorem 10.

In general case, we have the following theorem.

Theorem 13. (Singular Valued Decomposition for Gates)
Any linear gate $\hat{G}^{(n,m)}$ of order (n,m) can be represented by

$$\hat{G}^{(n,m)} = \hat{T}^{(m,m)} \hat{U}^{(m,m)} \hat{D}^{(n,m)} \hat{U}^{(n,n)},$$

where

$\hat{U}^{(m,m)}$ is an orthogonal quantum gate of order (m,m) .

$\hat{U}^{(n,n)}$ is an orthogonal quantum gate of order (n,n) .

$\hat{D}^{(n,m)}$ is a diagonal quantum gate (37) of order (n,m) .

$\hat{T}^{(m,m)}$ is a translation quantum gate of order (m,m) :

$$\hat{T}^{(m,m)} = \frac{1}{\sqrt{2^n 2^m}} \left(|0\rangle \langle 0| + \sum_{\mu=1}^p |\sigma_\mu\rangle \langle \sigma_\mu| + \sum_{\mu=0}^M T_\mu |\sigma_\mu\rangle \langle 0| \right),$$

where $p = \min\{N, M\}$ and $\lambda_k \geq 0$.

Proof. The proof of this theorem can be easily realized in matrix representation by using theorem 10.

Note that, any n -arguments classical gate $g(\nu_1, \dots, \nu_n)$ can be realized as linear trace-preserving quantum four-valued logic gate $\hat{G}^{(n,1)}$ of order $(n,1)$ by

$$\begin{aligned} \hat{G}^{(n,1)} = & |0\rangle \langle 0| + \sum_{\nu_1 \dots \nu_n \neq 0 \dots 0} |g(\nu_1, \dots, \nu_n)\rangle \langle \nu_1, \dots, \nu_n| + \\ & + (1 - \delta_{0g(0, \dots, 0)}) |g(0, \dots, 0)\rangle \langle 0 \dots 0| - \\ & - (1 - \delta_{0g(0, \dots, 0)}) \sum_{\mu=0}^{N-1} \sum_{\nu_1 \dots \nu_n} (1 - \delta_{\mu g(\nu_1, \dots, \nu_n)}) |\mu\rangle \langle \nu_1 \dots \nu_n|. \end{aligned}$$

In general case, this quantum gate is not unital gate.

References

- [1] Aharonov D., Kitaev A. and Nisan N., "Quantum circuits with mixed states." in *Proceedings of the Thirtieth Annual ACM Symposium on Theory of Computation* (STOC, 1997). pp. 20-30; LANL e-print quant-ph/9806029.
- [2] Davies E.B., *Quantum theory of open systems* (Academic Press, London, New York, San Francisco, 1976).
- [3] Gardiner C.W., *Quantum Noise* (Springer-Verlag, Berlin, New York, 1991).
- [4] Schumacher B., "Sending entanglement through noisy quantum channels." *Phys. Rev. A* **54**(4) (1996) 2614-2628; LANL e-print quant-ph/9604023.
- [5] Schumacher B. and Nielsen M.A., "Quantum data processing and error correction." *Phys. Rev. A* **54**(4) (1996) 2629-2635; LANL e-print quant-ph/9604022.
- [6] Shor P.W., "Scheme for reducing decoherence in quantum computer memory." *Phys. Rev. A* **52**(4) (1995) R2493-R2496.
- [7] Stean A.M., "Error correcting codes in quantum theory." *Phys. Rev. Lett.* **77**(5) (1996) 793-797.
- [8] Stean A.M., "Simple quantum error-correcting codes." *Phys. Rev. A* **54**(6) (1996) 4741-4751.

- [9] Calderbank A.R. and Shor P.W., "Good quantum error-correcting codes exist." *Phys. Rev. A* **54**(2) (1996) 1098-1105.
- [10] Calderbank A.R., Rains E.M., Shor P.W. and Sloane N.J.A., "Quantum error correction via codes over GF(4)." LANL e-print quant-ph/9608006.
- [11] Preskill J., "Reliable quantum computers." *Proc. Roy. Soc. Lond. A* **454** (1998) 385-410. LANL e-print quant-ph/9705031.
- [12] Bennett C.H., DiVincenzo D.P., Smolin J.A. and Wootters W.K., "Mixed state entanglement and quantum error correction." *Phys. Rev. A* **54**(4) (1996) 3824-3851; LANL e-print quant-ph/9604024.
- [13] Unruh W.G., "Maintaining coherence in quantum computers." *Phys. Rev. A* **51**(2) (1995) 992-997; LANL e-print hep-th/9406058.
- [14] Palma G.M., Suominen K.A. and Ekert A.K., "Quantum computers and dissipation." *Proc. Roy. Soc. Lond. A* **452** (1996) 567-584; LANL e-print quant-ph/9702001.
- [15] Barenco A., Brun T.A., Schack R. and Spiller T.P., "Effects of noise on quantum error correction algorithms." *Phys. Rev. A* **56**(2) (1997) 1177-1188; LANL e-print quant-ph/9612047.
- [16] Miquel C., Paz J.P. and Perazzo R., "Factoring in a dissipative quantum computer." *Phys. Rev. A* **54** (1996) 2605-2613; LANL e-print quant-ph/9601021.
- [17] Omnès R., "General theory of decoherence effects in quantum mechanics." *Phys. Rev. A* **56**(5) (1997) 3383-3394.
- [18] Lidar D.A., Chuang I.L. and Whaley K.B., "Decoherence-free subspaces for quantum computation." *Phys. Rev. Lett.* **81**(12) (1998) 2594-2597; LANL e-print quant-ph/9807004.
- [19] Bacon D., Lidar D.A. and Whaley K.B., "Robustness of decoherence-free subspaces for quantum computation." *Phys. Rev. A* **60**(3) (1999) 1944-1955.
- [20] Zanardi P., "Dissipation and decoherence in a quantum register." *Phys. Rev. A* **57**(5) (1998) 3276-3284; LANL e-print quant-ph/9705045.
- [21] Zanardi P. and Rasetti M. "Error avoiding quantum codes." *Mod. Phys. Lett. B* **11**(5) (1997) 1085; LANL e-print quant-ph/9710041.
- [22] Terhal B.M., Chuang I.L., DiVincenzo D.P., Crassl M. and Smolin J.A., "Simulating quantum operations with mixed environments." *Phys. Rev. A* **60** (1999) 881-885; LANL e-print quant-ph/9806095.
- [23] Terhal B.M. and DiVincenzo D.P., "The problem of equilibration and the computation of correlation functions on a quantum computer." *Phys. Rev. A* **61** (2000) 2301; LANL e-print quant-ph/9810063.
- [24] Bacon D., Childs A.M., Chuang I.L., Kempe J. Leung D.W. and Zhou X., "Universal simulation of Markovian quantum dynamics." LANL e-print quant-ph/0008070.
- [25] Lloyd S. and Viola L., "Control of open quantum system dynamics." LANL e-print quant-ph/0008101.
- [26] Abrams D.S. and Lloyd S., "Simulation of many-body Fermi systems on a universal quantum computer." *Phys. Rev. Lett.* **79**(13) (1997) 2586-2589; LANL e-print quant-ph/9703054.
- [27] Zalka C., "Simulating quantum systems on a quantum computer." *Proc. Roy. Soc. Lond. A* **454** (1998) 313-322; LANL e-print quant-ph/9603026.
- [28] Crawford J.A., "An alternative method of quantization." *Nuovo Cim.* **10**(4) (1958) 698-713.
- [29] Fano U., "Description of states in quantum mechanics by density matrix and operator techniques." *Rev. Mod. Phys.* **29**(1) (1957) 74-93.
- [30] Schwinger J., "The geometry of quantum states." *Proc. Nat. Acad. Sci.* **46**(2) (1960) 257-265.
- [31] Schwinger J., "Unitary operator basis." *Proc. Nat. Acad. Sci.* **46** (1960) 570-579.
- [32] Primas H., "Eine verallgemeinerte Störungstheorie für quantenmechanische Mehrteilchenprobleme." *Helv. Phys. Acta* **34**(4) (1961) 331-351.
- [33] Fano U., "Lectures on many-body problem." in: *Proc. 5th International Summer School of Physics* (Ravello 1963) Ed. E.R. Caianiello. (Academic Press, New York, 1964) p.217.
- [34] Emch G., "Coarse-graining in Liouville space and master equation." *Helv. Phys. Acta* **37**(6) (1964) 532-544.
- [35] Sauermann G., "On the theory of spin-spin relaxation." *Physica* **32**(11-12) (1966) 2017-2029.
- [36] Gabriel H., "Theory of the influence of environment on the angular distribution of nuclear radiation." *Phys. Rev.* **181**(2) (1969) 506-521.
- [37] Schwinger J., *Quantum kinematics and dynamics* (W.A. Benjamin Inc., New York, 1970) (Chapters 2.11, 2.12)
- [38] Prigogine I., George C., Henin F. and Rosenfeld L., *Chemica Scripta* **4** (1973) 5.
- [39] Bosse J. and Gabriel H., "Theory of quantum beats." *Zeitsch. Phys.* **266** (1974) 283-286.
- [40] Schmutz M., "Real-time Green's functions in many body problems." *Zeitsch. Phys. B* **30** (1978) 97-106.
- [41] Mehring M., *High resolution NMR spectroscopy in solids* (Springer-Verlag, Berlin, Heidelberg, New-York, 1976). (Application D)
- [42] Blum K., *Density matrix. Theory and applications* (Plenum Press, New York, London, 1981). (Chapter 7.6)
- [43] Remler E.A., "Composite particle cross section from the density operator." *Ann. Phys.* **136** (1981) 293-316.
- [44] Abragam A. and Goldman M., *Nuclear magnetism. Order and disorder* (Clarendon Press, Oxford, 1982). (Chapter 1B)
- [45] Arimitsu T. and Umezawa H., "Non-equilibrium thermo-field dynamics." *Prog. Theor. Phys.* **77**(1) (1987) 32-52.
- [46] Fick E. and Sauermann G., *The quantum statistics of dynamic processes* (Springer-Verlag, Berlin, Heidelberg, New York, 1990). (Chapters 3.1., 8.1., 8.2.)
- [47] Suzuki M., "Density matrix formalism, double-space and thermofield dynamics in non-equilibrium dissipative systems." *Int. J. Mod. Phys. B* **5**(11) (1991) 1821-1842.
- [48] Umezawa H., *Advanced Field Theory* (AIP, New York, 1993).
- [49] Chernyak V. and Mukamel S., "Time-dependent density-matrix functional in Liouville space and the optical response of many-electron systems." *Phys. Rev.* **52**(5) (1995) 3601-3621.

- [50] Tarasov V.E., "Quantum non-Hamiltonian systems: Definition and algebraic structures." in *Proc. XI International Workshop on HEP and QFT* (Sankt-Peterburg, 1996), (MSU, Moscow, 1997). p.368-371.
- [51] Caves C.M., "Quantum error correction and reversible operations." *J. Superconductivity* **12** (1999) 707; LANL e-print quant-ph/9811082.
- [52] Schack R. and Caves C.M., "Explicit product ensembles for separable quantum states." *J. Mod. Opt.* **47** (2000) 387-399; LANL e-print quant-ph/9904109.
- [53] Tarasov V.E., *Quantum mechanics. Lectures on theory foundation* (Vuzovskaya kniga, Moscow, 2000). (Chapters 4,10,11,15)
- [54] Tarasov V.E., *Mathematical introduction to quantum mechanics* (MAI Publ. Com., Moscow, 2000). (Chapters 2,3,5)
- [55] Bechmann-Pasquinucci H. and Tittel W., "Quantum cryptography using larger alphabets." *Phys. Rev. A* **61** (2000) 062308-062313.
- [56] Rungta P., Murno W.J., Nemoto K., Deuar P., Milburn G.L. and Caves C.M., "Qudit entanglement." LANL e-print quant-ph/0001075.
- [57] Cerf N.J., Bourennane M., Karlsson A. and Gisin N., "Security of key distribution using d-level system." LANL e-print quant-ph/0107130.
- [58] Dennison K.A. and Wootters W.K., "Entanglement sharing among d qudits." LANL e-print quant-ph/0106058.
- [59] Brylinski J.L. and Brylinski R., "Universal quantum gates." LANL e-print quant-ph/0108062.
- [60] Cerf N., Massar S. and Pironio S., "Greenberg-Horne-Zeilinger paradoxes for many qudits." LANL e-print quant-ph/0107031.
- [61] Gorini V., Kossakowski A. and Sudarshan E.C.G., "Completely positive dynamical semigroups of n-level systems." *J. Math. Phys.* **17**(5) (1976) 821-825.
- [62] Lindblad G., "On the generators of quantum dynamical semigroups." *Commun. Math. Phys.* **48** (1976) 119-130.
- [63] Gorini V., Frigerio A., Verri M., Kossakowski A. and Sudarshan E.C.G., "Properties of quantum Markovian master equations." *Rep. Math. Phys.* **13**(2) (1978) 149-173.
- [64] Parravicini G. and Zecca A., "On the generator of completely positive dynamical semigroups of n-level system." *Rep. Math. Phys.* **12**(3) (1977) 423-424.
- [65] Kossakowski A., *Bull. Acad. Pol. Ser. Sci. Math. Astr. Phys.* **21** (1973) 649.
- [66] Alicki R. and Lendi K., *Quantum dynamical semigroups and applications* (Springer-Verlag, Berlin, 1987).
- [67] Belavin A.A., Zeldovich B.Ya., Perelomov A.M. and Popov V.S., "Relaxation of quantum systems with equidistant spectra." *J. Exp. Theor. Phys.* **56**(1) (1969) 264-274.
- [68] Hellwing K.E. and Kraus K., "Pure operations and measurements." *Commun. Math. Phys.* **11**(3) (1969) 214-220.
- [69] Hellwing K.E. and Kraus K., "Operations and measurements. II." *Commun. Math. Phys.* **16**(2) (1970) 142-147.
- [70] Kraus K., "General state changes in quantum theory." *Ann. Phys.* **64** (1971) 311-335.
- [71] Kraus K., *States, effects and operations. Fundamental notions of quantum theory* (Springer-Verlag, Berlin, Helderberg, New York, Tokyo, 1983).
- [72] Rescher N., *Many-valued logic* (Mc.Graw-Hill, New York, 1969).
- [73] Rosser J.B. and Turquette A.R., *Many-valued logics* (North Holland Publ. Co., Amsterdam, 1952).
- [74] Yablonskii S.V., "Functional constructions in k-valued logic." *Proc. Steklov Mathem. Inst. (USSR)* **51** (1958) 5-142.
- [75] Yablonskii S.V., *Introduction to discrete mathematics* 2nd ed. (Nauka, Moscow, 1985).
- [76] Lukasiewicz J. and Tarski A., "Investigations into the sentential calculus." in: *Logic, semantics, methamatics* Eds. A. Tarski. (Oxford 1956).
- [77] Post E. L., "Introduction to a general theory of elementary propositions." *Amer. J. Math.* **43**(3) (1921) 163-185.
- [78] Piccard S., "Sur les fonctions definies dans les ensembles finis quelconque." *Fund. Math.* **24** (1955) 183-185.
- [79] Barenco A., "A universal two-bit gate for quantum computation." *Proc. Roy. Soc. Lond. A* **449** (1995) 679-683; LANL e-print quant-ph/950516.
- [80] Barenco A., Bennett C.H., Cleve R., DiVincenzo D.P., Margolus N., Shor P., Sleator T., Smolin J.A. and Weinfurter H., "Elementary gates for quantum computation." *Phys. Rev. A* **52**(5) (1995) 3457-3467; LANL e-print quant-ph/9503016.
- [81] Deutsch D., Barenco A. and Ekert A., "Universality in quantum computations." *Proc. Roy. Soc. Lond. A* **449** (1995) 669-677; LANL e-print quant-ph/9505018.
- [82] DiVincenzo D.P., "Two-bit gates are universal for quantum computation." *Phys. Rev. A* **51**(2) (1995) 1015-1022; LANL e-print cond-mat/9407022.
- [83] Lloyd S., "Almost any quantum logic gate is universal." *Phys. Rev. Lett.* **75**(2) (1995) 346-349.
- [84] Barut A.O. and Raczka R., *Theory of group representations and applications* (PWN-Polish Scientific Publ., Warszawa, 1977).
- [85] Gantmaher F.R., *Matrix theory* 3rd ed. (Nauka, Moscow, 1967).
- [86] Fujiwara A. and Algoet P., "One-to-one parametrization of quantum channels." *Phys. Rev. A* **59**(5) (1999) 3290-3294.
- [87] King C. and Ruskai M.B., "Minimal entropy of states emerging from noisy quantum channels." LANL e-print quant-ph/9911079.
- [88] Ruskai M.B., Szarek S. and Werner E., "An analysis of completely-positive trace-preserving map on \mathcal{M}_2 ." LANL e-print quant-ph/0101003.
- [89] Choi M.D., "Completely positive linear maps on complex matrices." *Lin. Alg. Appl.* **10** (1975) 285.
- [90] Eckart C. and Young G., "A principal axis transformation for non-Hermitian matrices." *Bull. Amer. Math. Soc.* **45** (1939) 118-121.
- [91] Lanzos C., "Linear systems in selfadjoint form." *Amer. Math. Monthly* **65** (1958) 665-779.
- [92] Schwerdtfeger H., "Direct proof of Lanzos's decomposition theorem." *Amer. Math. Monthly* **67** (1960) 855-860.

- [93] Holer C.B. and Morrison D., "Singular value analysis of cryptograms." Amer. Math. Monthly **90** (1983) 78-87.
- [94] Vilenkin N.Ya., *Special functions and the theory of group representation* 2nd ed. (Moscow, Nauka, 1991) or Amer. Math. Soc. Tranl. of Math. Monographs Vol.22. 1968.
- [95] Vilenkin N.Ya. "Matrix elements of irreducible unitary representations for the group of real orthogonal matrix and motiom group of $(N - 1)$ -dimensional euclidean space." Dokladi USSR Acad. Sci. **113**(1) (1957) 16-19.
- [96] Orihara A. "Bessel functions and the euclidean motion group." Tohoku Math. J. **13**(1) (1961) 66-74.
- [97] Mabuchi H. and Zoller P., "Inversion of quantum jumps in quantum optical systems under continuous observation." Phys. Rev. Lett. **76**(17) (1996) 3108-3111.
- [98] Knill E. and Laflamme R., "Theory of quantum error-correcting code." Phys. Rev. A. **55**(2) (1997) 900-911; LANL e-print quant-ph/9604034.
- [99] Nielsen M.A., Caves C.M., Schumacher B. and Barnum H., "Information-theoretic approach to quantum error correction and reversible measurment." LANL e-print quant-ph/9706064.
- [100] Nielsen M.A. and Caves C.M., "Reversible quantum operations and their application to teleportation." Phys. Rev. A. **55**(4) (1997) 2547-2556; LANL e-print quant-ph/9608001.